

04/13/00  
jc600 U.S. PTO

OSTROLENK, FABER, GERB & SOFFEN, LLP  
Attorneys at Law  
1180 Avenue of the Americas  
New York, New York 10036-8403  
(212) 382-0700

Telex  
23 6925  
Facsimile  
(212) 382-0888  
Cable  
Ostrofaber NewYork

A  
jc520 U.S. PTO  
09/548817  
04/13/00

Express Mail #EL008135176US

Asst. Commissioner for Patents  
Washington, DC 20231

OFGS File No. : P/3241-12  
Inventor : Hidetoshi ENDO et al  
Title : VIEWFINDER CONTROL UNIT AND TELEVISION CAMERA  
Assignee : Ikegami Tsushinki Co., Ltd.

Enclosed herewith please find the following documents in the above-identified application for United States Letters Patent:

- 34 Pages of Specification including Abstract and Claims
- 18 Numbered Claims Calculated as 18 Claims for Fee Purposes
- 25 Sheets of Drawing Containing Figures 1 to 25.
- X Declaration and Power of Attorney
- X Priority is Claimed under 35 U.S.C. §119:
- Convention Date April 16, 1999 for Japan Appln. S.N. 11-109647
- X Certified Priority Application
- X Preliminary Amendment
- X Assignment
- X Return-Addressed Post Card

OFGS Check No. 93276, which includes the fee of \$730.00, calculated as follows:

Basic Filing Fee:	\$ 690.00
Additional Filing Fees:	
Total Number of Claims in Excess of 20, times \$18:	
Number of Independent Claims in Excess of 3, times \$78:	
One or More Multiple Dependent Claims: Total \$260.	
Total Filing Fees or	690.00
Total Filing Fee Reduced 50% for Small Entity:	
Assignment Recording Fee: \$40	40.00
TOTAL Filing Fee and Assignment Recording Fee:	<u>\$ 730.00</u>

In the event the actual fee is greater than the payment submitted or is inadvertently not enclosed, or if any additional fee during the prosecution of this case is not paid, the Patent and Trademark Office is authorized to charge the underpayment to Deposit Account No. 15-0700.

EXPRESS MAIL CERTIFICATE

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee (mail label #EL008135176US) in an envelope addressed to: Asst. Commissioner for Patents, Washington, D.C. 20231, on April 13, 2000:

Dorothy Jenkins  
Name of Person Mailing Correspondence

*Dorothy Jenkins*

Signature  
April 13, 2000  
Date of Signature

Respectfully submitted,

*Samuel H. Weiner*

Samuel H. Weiner  
Registration No.: 18,510  
OSTROLENK, FABER, GERB & SOFFEN, LLP  
1180 Avenue of the Americas  
New York, New York 10036-8403  
Telephone: (212) 382-0700

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of

New York, New York

Hidetoshi ENDO et al

Date: April 13, 2000

Serial No.:

Group Art Unit:

Filed:

Examiner:

For: VIEWFINDER CONTROL UNIT AND TELEVISION CAMERA

Hon. Commissioner of Patents

and Trademarks

Washington, D.C. 20231

PRELIMINARY AMENDMENT

Sir:

Prior to examination, please amend the application as follows:

IN THE CLAIMS:

Please amend claims 9 and 18 as follows.

Claim 9, line 2, change "any one of claims 1-8" to --claim 1--.

Claim 18, line 2, change "any one of claims 10-17" to --claim 10--.

REMARKS

This Preliminary Amendment is submitted to change the multiple dependent claims to single dependent claims in order to reduce the government filing fee.

EXPRESS MAIL CERTIFICATE

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee (mail label EL008135176US) in an envelope addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231, on April 13, 2000:

Dorothy Jenkins

Name of Person Mailing Correspondence

*Dorothy Jenkins*

Signature

April 13, 2000

Date of Signature

Respectfully submitted,

*Samuel H. Weiner*

Samuel H. Weiner

Registration No.: 18,510

OSTROLENK, FABER, GERB & SOFFEN

1180 Avenue of the Americas

New York, New York 10036-8403

Telephone: (212) 382-0700

# VIEWFINDER CONTROL UNIT AND TELEVISION CAMERA

This application is based on Japanese Patent Application No. 11-109647 (1999) filed April 16, 1999, the content of which is incorporated hereinto by reference.

5

## BACKGROUND OF THE INVENTION

### FIELD OF THE INVENTION

10       The present invention relates to a viewfinder control unit for visually confirming a picture picked up by a television camera, and to the television camera mounted with the viewfinder control unit.

More particularly, the present invention relates  
15       to a viewfinder control unit suitable for controlling a liquid crystal viewfinder integrally mounted on a television camera, and a television camera equipped with the viewfinder control unit.

### 20       DESCRIPTION OF THE RELATED ART

Recently, with the improvement in the characteristics of small-sized liquid crystal display monitors, home video cameras with a built-in image  
25       monitor are widely spreading (see, Japanese patent application laid-open No. 8-23466 (1996), for example).

In such a home video camera, the direction of its image monitor changes in conjunction with the movement of the television camera. Thus, a state is always maintained in which the eyes of an operator and the  
5 screen of the image monitor face each other.

On the other hand, as for a live camera, typified by a studio television camera, or a portable video camera settled on a tripod, since its image monitor changes the position in connection with the movement  
10 of the lens, the camera operator must move his or her face so that it faces the image monitor, or changes the direction of the monitor every time its direction varies.

In addition, since the mounted position and  
15 display angle of the image monitor are not always settled in optimum states for the television camera operator to watch, the operator must turn the image monitor manually as needed.

When it is equipped with conventional CRT monitor,  
20 even such a television camera seldom arises a problem of hindering viewing every time panning or tilting is made. However, using a liquid crystal display as its image monitor presents a problem of requiring more accurate angle adjustment from time to time, which is  
25 very tedious. This is because, although the visual characteristics of the liquid crystal display are considerably improved at present, its image quality

sharply degrades when images to be monitored deviate from the normal position by more than a certain angle, and hence it cannot achieve its function as a monitor.

In other words, it is desired, every time the  
5 direction of the television camera lens is changed by panning and tilting, that the angle of the image monitor be varied so that the image monitor always faces the eyes of the camera operator.

On the other hand, although various techniques are  
10 known that detect a particular form or color of a subject to automatically trace its movement (see, Japanese patent application laid-open No. 6-30318 (1994), for example), a technique is not yet known that always trains the image monitor of a television camera  
15 on the face of the camera operator. In particular, because panning or tilting or changing the position of a television camera (in the vertical direction) is sometimes made even for a stationary subject (see, Figs. 10A and 10B), the conventional tracking techniques to  
20 a subject cannot be applied to the television camera viewfinder without change.

#### SUMMARY OF THE INVENTION

25 The present invention is implemented to solve the foregoing problem. It is therefore an object of the present invention to provide a viewfinder control unit

and a television camera capable of always training its viewfinder on the face of a camera operator in conjunction with the panning and tilting of the television camera.

5        In the first aspect of the present invention, there is provided a viewfinder control unit for controlling a viewfinder for showing an image output from a television camera, the viewfinder control unit comprising:

10        detecting means for detecting a particular color portion of a television camera operator; and

         driving means for training the viewfinder on a face of the television camera operator in response to a detection output from the detecting means.

15        Here, the detecting means may comprise a miniature camera for sensor application attached to the viewfinder, and may detect the particular color portion of the television camera operator from an output of the miniature camera for sensor application.

20        The detecting means may detect a flesh color portion on the face of the television camera operator as the particular color portion.

         The viewfinder may consist of a liquid crystal display.

25        The miniature camera for sensor application may be rotatably attached to the viewfinder to make panning and/or tilting possible for capturing an accessory worn

on the television camera operator.

The accessory to be captured by the miniature camera for sensor application may consist of a weakly luminous object worn on the television camera operator.

5       The viewfinder control unit may further comprise:  
storing means for storing information on a preset position of the viewfinder; and

preset control means for returning the viewfinder to the preset position in accordance with the  
10 information on the preset position stored in the storing means.

The miniature camera for sensor application may be used as an image pickup device of a videophone, and the viewfinder may be used as a display unit of the  
15 videophone.

A television camera may comprise the viewfinder control unit such that the viewfinder is always trained on the face of the television camera operator independently of panning and/or tilting of the  
20 television camera.

In the second aspect of the present invention, there is provided a viewfinder control unit attached to a television camera, the viewfinder control unit comprising:

25       detecting means for detecting a particular color portion of a television camera operator;

calculation means for calculating a central

position of the particular color portion; and

driving means for driving a motor for panning and/or tilting the viewfinder in response to the central position calculated.

5 Here, the detecting means may comprise a miniature camera for sensor application attached to the viewfinder, and may detect the particular color portion of the television camera operator from an output of the miniature camera for sensor application.

10 The detecting means may detect a flesh color portion on the face of the television camera operator as the particular color portion.

The viewfinder may consist of a liquid crystal display.

15 The miniature camera for sensor application may be rotatably attached to the viewfinder to make panning and/or tilting possible for capturing an accessory worn on the television camera operator.

The accessory to be captured by the miniature  
20 camera for sensor application may consist of a weakly luminous object worn on the television camera operator.

The viewfinder control unit may further comprise:  
storing means for storing information on a preset  
position of the viewfinder; and

25 preset control means for returning the viewfinder to the preset position in accordance with the information on the preset position stored in the



storing means.

The miniature camera for sensor application may be used as an image pickup device of a videophone, and the viewfinder may be used as a display unit of the videophone.

A television camera may comprise the viewfinder control unit such that the viewfinder is always trained on the face of the television camera operator independently of panning and/or tilting of the television camera.

The above and other objects, effects, features and advantages of the present invention will become more apparent from the following description of embodiments thereof taken in conjunction with the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic diagram illustrating an overall concept of a viewfinder in accordance with the present invention;

Fig. 2 is an enlarged diagram showing the viewfinder VF as shown in Fig. 1 with its ancillary components;

Fig. 3 is a block diagram showing a viewfinder control circuit in an embodiment 1 in accordance with the present invention;

Fig. 4 is a circuit diagram showing a flesh color detector 2 as shown in Fig. 2 in detail;

Fig. 5 is a diagram illustrating detection of a central position of a face in the embodiment 1;

5 Fig. 6 is a diagram illustrating the detection of the central position of the face in the embodiment 1;

Fig. 7 is a diagram illustrating motion direction detection;

Fig. 8 is a block diagram showing a viewfinder control circuit in an embodiment 2 in accordance with the present invention;

Fig. 9 is a diagram illustrating detection of a central position of a face in the embodiment 2;

15 Figs. 10A and 10B are diagrams each illustrating a tracking state of the viewfinder VF that automatically tracks the face of a cameraman when he or she changes the height of the television camera by operating a dolly;

Fig. 11 is a perspective view showing an embodiment 20 3 in accordance with the present invention;

Fig. 12 is another perspective view showing the embodiment 3 in accordance with the present invention;

Fig. 13 is a side view of an embodiment 4 in accordance with the present invention;

25 Fig. 14 is a front view of the embodiment 4;

Fig. 15 is a side view of an embodiment 5 in accordance with the present invention;

Fig. 16 is a front view of the embodiment 5;

Figs. 17A and 17B are diagrams each illustrating an operation of an embodiment 6 in accordance with the present invention;

5 Fig. 18 is a perspective view showing an overall structure of the embodiment 6;

Fig. 19 is an enlarged detail showing a tilting mechanism in the embodiment 6;

Fig. 20 is a front view showing the tilting  
10 mechanism in the embodiment 6 in detail;

Fig. 21 is an enlarged view showing a sensor mount member SE-BASE in the embodiment 6;

Fig. 22 is a circuit diagram showing a part of an embodiment 7 in accordance with the present invention;

15 Fig. 23 is a block diagram showing a preset section in the embodiment 7;

Fig. 24 is a diagram illustrating an operation in an embodiment 8 in accordance with the present invention; and

20 Fig. 25 is another diagram illustrating the operation in the embodiment 8.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

25 The invention will now be described with reference to the accompanying drawings.

Fig. 1 is a diagram illustrating an overall concept

of a viewfinder in accordance with the present invention, and Fig. 2 is an enlarged diagram showing the viewfinder VF and its ancillary components as shown in Fig. 1. In these figures, the reference symbol CA  
5 designates a television camera; LE designates a camera lens; VF designates a liquid crystal viewfinder with a hood F; and SE designates a sensor (miniature television camera) for picking up the face of a cameraman. The reference symbol PM designates a pan  
10 motor for horizontally rotating the viewfinder VF; and TM designates a tilt motor for varying the angle the viewfinder VF makes with a horizontal plane to provide the cameraman with an optimum view angle.

With the foregoing arrangement, the viewfinder VF  
15 carries out tracking such that it is always trained on the face of a cameraman in connection with the pan (left or right turn of the lens LE) or tilt (up or down rotation of the lens LE) of the television camera CA.

Next, an electric configuration for implementing  
20 such an operation of the viewfinder VF will be described.

#### EMBODIMENT 1

Fig. 3 shows an example of a viewfinder control  
25 circuit. In this figure, the reference symbol SE designates the sensor as shown in Figs. 1 and 2, which picks up the face of the cameraman. The reference

numeral 2 designates a flesh color detector that outputs a high level signal when it detects a flesh color portion of the cameraman in response to the R, G and B signals supplied from the sensor SE (the detail  
5 of the flesh color detector will be described later with reference to Fig. 4). The reference numeral 4 designates a central position calculator that calculates the central position of the face of the cameraman from the high level signal supplied from the  
10 flesh color detector 2 (the detail of the central position calculator will be described later with reference to Figs. 5 and 6). The reference numeral 6 designates a memory including three stacks IR, R1 and R2 (the detail of the memory will be described later).  
15 The reference numeral 8 designates a motion direction detector for generating in response to the values stored in the memory 6 a control signal for having the viewfinder VF to carry out pan and tilt (the detail of the motion direction detector will be described later  
20 with reference to Fig. 7). The reference numeral 10 designates a motor driver for driving the pan motor PM and tilt motor TM. The reference symbols SW1 and SW2 each designate a manual switch for manually changing the position of the viewfinder VF. The reference  
25 numeral 12 designates a selector for causing the motors PM and TM to rotate in response to the operation of the manual switches SW1 and SW2 (right, left, up or down)

giving the highest priority to the switch operation. Although the operator moves his or her hand off the manual switches SW1 and SW2 in the OFF state, the automatic tracking of the apparatus does not start  
5 until the initial setting is made again. In other words, the selector 12 selects the output of the motor driver 10 when an initial set switch (not shown) is turned on again.

Next, the operation of the flesh color detector  
10 2 will be described in more detail with reference to Fig. 4.

Fig. 4 shows a circuit configuration of the flesh color detector 2 in detail. In this figure, reference symbols R, G and B designate the R, G and B signals  
15 supplied from the sensor SE, respectively. The reference numeral 21 designates an amplifier with an amplification factor X (X is externally settable); 22 designates an amplifier with an amplification factor Y (Y is externally settable); and 23 and 24 each  
20 designate a subtracter. The reference numerals 25 and 26 each designate a converter for generating a logic "0" signal when the signal level supplied from the subtracter 23 or 24 is zero, and a logic "1" signal in the remaining cases. The reference numeral 27  
25 designates an invert-AND circuit for outputting a high level signal when the sensor SE detects the flesh color.

Next, the operation principle of the circuit of

Fig. 4 will be described.

To determine the hue using the sensor SE, it is necessary to determine the ratios between the levels of the R, G and B signals. Assume that the ratios  
5 between the levels of the R, G and B signals of the face of the cameraman are:

$$R:G = 1:X$$

$$B:G = 1:Y \qquad \cdots(1)$$

10

then,

$$G = R \cdot X$$

$$G = B \cdot Y \qquad \cdots(2)$$

15

therefore,

$$R \cdot X - G = 0$$

$$B \cdot Y - G = 0 \qquad \cdots(3)$$

20

Thus, assuming the following expression for a particular color (flesh color, here):

$$R:G:B = a:b:c \qquad \cdots(4)$$

25

$$G = (b/a) \cdot R$$

$$G = (b/c) \cdot B \qquad \cdots(5)$$

then, expression (3) will hold when setting X and Y as follows:

$$\begin{aligned} X &= b/a \\ Y &= b/c \end{aligned} \quad \cdots(6)$$

In other words, the R, G and B signals representing the particular color (flesh color, here) can be detected by presetting X and Y as equation (6) above.

Applying this detection principle to an actual circuit leads to the flesh color detector 2. Specifically, since the outputs of the subtracters 23 and 24 become  $(R \cdot X - G)$  and  $(B \cdot Y - G)$  at the time equation (3) is satisfied, the AND circuit 27 outputs a high level flesh color detection signal at that time. When the high level flesh color detection signal is output,  $R:G:B = a:b:c$  holds.

Incidentally, to provide variations (tolerance) of some extent to the value representing the hue of the flesh color, it is possible to install window comparators as disclosed in Fig. 1 of Japanese patent application laid-open No. 5-292519 (1993) filed by the assignee of the present application. In addition, the hue of the flesh color can be set individually taking account of the differences of respective cameramen.

Returning to Fig. 3, the operation of the central



position calculator 4 will be described.

Assume that the face of the cameraman as shown in Fig. 5(A) is acquired by the sensor SE. Then, the flesh color detector 2 outputs a signal that takes a high level at a portion of the face on a scanning line X-X' as shown in Fig. 5(B). The middle point of the high level section is given by  $(T_1 + T_2)/2$  with respect to a scanning start point (horizontal sync signal), where  $T_1$  and  $T_2$  are time periods from the scanning start point.

Obtaining such middle points for all the scanning lines passing through the face, and connecting them with solid lines will give a locus as shown in Fig. 6. Then, the middle point of the locus as shown in Fig. 6 can be obtained by  $(Y_1 + Y_2)/2$ , where  $Y_1$  and  $Y_2$  are scanning line numbers.

The middle point of the locus thus obtained is considered to be the center of the face. Thus, in this field, the point x as shown in Fig. 6 is decided as the center of the face, and the position information is stored in the next stage of the memory 6. More specifically, the face center coordinates of the current field are written into the stack R1 of the memory 6 after shifting the face center coordinates (the face center coordinates of the previous field) having been stored in the stack R1 to the stack R2.

Although the foregoing center coordinate calculation method is not an accurate calculation

process, it presents no problem in an actual operation because the face of the cameraman is close to the viewfinder VF.

Fig. 7 is a schematic diagram illustrating the  
5 current field center (R1) and previous field center (R2) stored in the stack R1 and stack R2 of the memory 6. The arrow in Fig. 7 represents a motion vector, and the motion direction detector 8 supplies a motor control signal corresponding to the motion vector to  
10 the motor driver 10. Although a slight movement by an amount of one scanning line will arise because of the interlaced scanning between an odd field and even field even in a static state involving no motion, the motion direction detector 8 disregards the movement as a  
15 negligible error.

Thus, the motor driver 10 has the pan motor PM and tilt motor TM rotate (see, Figs. 1 and 2), thereby carrying out the viewfinder drive that automatically tracks the face of the cameraman.

20 To start the viewfinder drive, that is, to start the automatic tracking of the face, it is necessary for the cameraman to depress the initial setting switch (not shown) while he or she looks at the front of the liquid crystal display screen of the viewfinder VF so  
25 that the face center coordinates at the time are written into the stack IR (initial setting register) of the memory 6. Accordingly, an instruction is given in this

case in order to halt the operation of the motion  
direction detector 8. The face center coordinates  
written in the stack IR are copied into the stack R1  
by the time the central position calculation of the next  
5 field is carried out. The content stored in the stack  
IR is held as a point of convergence until it is updated  
by the next initial setting.

The automatic tracking of the particular color in  
the present embodiment 1 is only an example, and hence  
10 the present invention is not limited to it.

#### EMBODIMENT 2

Fig. 8 shows another viewfinder control circuit,  
in which the same reference numerals designate the same  
15 components as those of Fig. 3. Thus, the description  
will be omitted here of the same components, the sensor  
SE, flesh color detector 2, memory 6, motion direction  
detector 8, motor driver 10, manual switches SW1 and  
SW2, selector 12, pan motor PM and tilt motor TM.

20 In Fig. 8, newly added components are an AND circuit  
40, a contour extractor 42, a smoothing processor 44,  
a maximum and minimum value detector 46 and a calculator  
48.

Next, their operations will be described.

25 The AND circuit 40 receives the R, G and B signals  
from the sensor SE and the (high level) flesh color  
detection signal from the flesh color detector 2.

Accordingly, the contour extractor 42 outputs a contour signal only when the flesh color detector 2 detects the flesh color, in which case the contour of the flesh color portion is obtained. However, since the contour  
5 signal includes high frequency components, it is not always a continuous signal. Considering this, the smoothing processor 44 carries out low frequency filtering of the contour signal to form a continuous flesh color area.

10 The signal representing the continuous flesh color area is supplied to the maximum and minimum value detector 46. In response to the signal, the detector 46 detects minimum value  $X_1$  and maximum value  $X_2$  in the horizontal direction, and minimum value  $Y_1$  and maximum  
15 value  $Y_2$  in the vertical direction as shown in Fig. 9. Thus, a quadrilateral ABCD including the flesh color area is detected.

In the present embodiment 2, the point of intersection  $z$  of the diagonals of the quadrilateral  
20 ABCD is considered the central position of the face, so that the calculator 48 obtains the X-coordinate and Y-coordinate of the central position  $Z$ . As is clear from Fig. 9, the X-coordinate is given by  $(X_1 + X_2)/2$ , and the Y-coordinate is given by  $(Y_1 + Y_2)/2$ .

25 According to the present embodiment 2, changing the height of the television camera by operating the dolly as shown in Figs. 10A and 10B does not require

any adjustment of the direction of the viewfinder which must be carried out manually in a conventional camera, because the viewfinder VF automatically tracks the face of the cameraman.

5

### EMBODIMENT 3

Fig. 11 shows an embodiment which varies the mounting position of the tilt motor TM. Although the tilt motor TM is mounted on the base of the viewfinder VF in Fig. 2, it is mounted on the opposite side of the sensor SE in Fig. 11. Fig. 12 is a perspective view seen from the liquid crystal display screen side of the viewfinder VF.

### 15 EMBODIMENT 4

Fig. 13 (side view) and Fig. 14 (front view) show an embodiment in which the sensor SE is mounted on top of the viewfinder VF, and the driving mechanism for panning and tilting the viewfinder VF is installed in a bellows J.

### 20 EMBODIMENT 5

Fig. 15 (side view) and Fig. 16 (front view) show an embodiment in which an arm ARM for supporting the viewfinder VF is provided in such a manner that the viewfinder VF is slidable up and down. Specifically, the arm ARM for supporting the viewfinder VF is slidably

mounted on the base BASE in such a manner that it is disposed between the viewfinder VF and the base BASE.

#### EMBODIMENT 6

5       The present embodiment 6 enables the sensor (miniature television camera) SE itself to be panned and tilted manually. Specifically, as shown in Figs. 17A and 17B, it automatically capture a button on the cameraman's chest (see, Fig. 17A) or the top of the  
10   cameraman's hat (see, Fig. 17B), for example, rather than the cameraman's face.

Fig. 18 is a perspective view showing an overall structure of the viewfinder VF and sensor (miniature television camera) SE as shown in Figs. 17A and 17B.  
15   As shown in this figure, the sensor (miniature television camera) SE is mounted on a sensor mount member SE-BASE rather than on the viewfinder VF. Fig. 19 is a perspective view showing a mounted state of the camera in more detail, and Fig. 20 is a front view  
20   illustrating the relationship between the sensor (miniature television camera) SE and the sensor mount member SE-BASE.

Furthermore, Fig. 21 is an enlarged detail illustrating only the sensor mount member SE-BASE. In  
25   Figs. 21 and 20, the reference symbol WP designates a spring washer for fixing the sensor (miniature television camera) SE manually panned; and WT

designates a spring washer for fixing the sensor (miniature television camera) SE manually tilted.

Incidentally, a tilt drive system (tilt motor TM and gear) and a pan drive system (not shown in the drawings) of the viewfinder VF are each provided with a slip member SLP utilizing plane pressure as shown in Fig. 20. This makes it possible to face the viewfinder VF to any desired direction manually without applying undue force to the driving systems because their rotation axes slip smoothly by applying a force beyond a certain level.

Next, the operation of the present embodiment 6 will be described in more detail with reference to Figs. 17A, 17B-21.

To carry out automatic tracking of the cameraman, the foregoing embodiments 1-5 use the flesh color of the cameraman's face as the target of a specified color to be stored. In contrast with this, the present embodiment 6 utilizes as a target an accessory that moves in conjunction with the cameraman or a mark such as cameraman's wear or hat, which does not placed in front of the viewfinder VF because the direction of the sensor (miniature television camera) SE can be manually changed to the left or right or up or down as shown in Figs. 17A and 17B. Because the target has a certain positional relationship with the cameraman's face as shown in Figs. 17A and 17B, presetting the positional

relationship as an offset value makes it possible for the sensor (miniature television camera) SE to track an object other than the cameraman's face.

To make the offset setting, the present embodiment  
5 6 fixes the sensor (miniature television camera) SE by means of friction of the spring washers WP and WT (see, Figs. 20 and 21). This makes it possible for the cameraman to freely set the offset without applying undue load to the driving mechanism (pan motor, tilt  
10 motor and gear) of the viewfinder VF.

According to the present embodiment 6, using the same target such as wear or button of a particular color on a cameraman offers an advantage of being able to carry out accurate tracking of the target without  
15 restoring the target even if a cameraman changes. Furthermore, wearing a luminous object of a particular color on the wear as a target enables the automatic tracking in the dark. In particular, in dark environments such as in a theater, using as a target  
20 a weakly luminous object attached to the cameraman's chest or hat is effective.

#### EMBODIMENT 7

The embodiment 7 is designed such that the  
25 cameraman can return the viewfinder VF to its original preset position by one-touch operation independently of its current position. The preset position here



refers to the following: (1) a state in which the viewfinder VF faces the direction the cameraman desires; or (2) a normal state of the viewfinder VF (that is, the face of the viewfinder VF is perpendicular to the optical axis of the television camera CA, and is rear-facing at the back of the lens LE, which is also referred to as "front position").

Because a pan position preset section of the viewfinder VF is similar to a tilt position preset section, only the tilt position preset section will be described here.

The tilt position of the viewfinder VF is detected by a tilt position sensor POS as shown in Fig. 20. The tilt position sensor POS consists of a potentiometer including a slider terminal (not shown in the figure) moving on a resistor with the rotation of its rotation axis SHF4.

A tilt position detecting resistor RT as shown in Fig. 22 is an electrical equivalent of the tilt position sensor POS as shown in Fig. 20. The sliding terminal RTX attached to the shaft of the tilt position detecting resistor RT moves in accordance with the tilt operation of the viewfinder VF, thereby outputting a tilt position detection signal TDET.

Two comparators CT1 and CT2 connected to the sliding terminal RTX detect the arrival of the sliding terminal RTX at limit positions (that is, the left and

right ends of the tilt position detecting resistor RT), and output a tilt motor stop signal STP-T.

Likewise, the pan position drive section of the viewfinder VF outputs a pan position detection signal  
5 PDET and a pan motor stop signal STP-P.

Fig. 23 shows a configuration for storing the preset position of the viewfinder VF using the pan position detection signal PDET and tilt position detection signal TDET as shown in Fig. 22. In this  
10 figure, reference numerals 50A and 50B designate A/D converters for converting analog resistances represented by the pan and tilt position detection signals PDET and TDET into digital signals. The reference numeral 52 designates a preset memory for  
15 storing the pan-preset position and tilt-preset position. Fixing the viewfinder VF at any desired position, followed by depressing the preset switch enables the preset memory 52 to store the values of the pan position detection signal PDET and tilt position  
20 detection signal TDET at that position.

The reference numeral 54 designates a calculator for calculating differences between the pan-preset position and tilt-preset position read from the preset memory 52 and the pan position and tilt position output  
25 from the A/D converter 50B, respectively, and for supplying the difference signals to the pan motor/tilt motor drive section 56. In this case, the motor control

is halted when the value of each difference signal drops below a predetermined value to prevent hunting in an error tolerance range.

5 The pan motor/tilt motor drive section 56 has the same function as the motor driver 10 as shown in Figs. 3 and 8. Thus, the pan motor/tilt motor drive section 56 is supplied with the output signals from the motion direction detector 8 (see, Figs. 3 and 8). In addition, the pan motor/tilt motor drive section 56 supplies the  
10 selector 12 (see, Figs. 3 and 8) with the control signal. Since the operation in connection with this is described before, the description thereof is omitted here.

15 Since the tilt position detection signal TDET takes a value  $V_{dd}/2$  when the face of the viewfinder VF is perpendicular to the image pick-up direction of the camera CA, holding the signal in the preset memory 52 as a signal representing the preset position enables the viewfinder VF to be returned to the "front position"  
20 by one-touch operation.

Furthermore, turning off the automatic tracking function makes it possible for an attached remote controller to carry out pan and tilt for any desired direction.

25

#### EMBODIMENT 8

According to the present embodiment 8, "income

with video information" usable with a videophone touch can be implemented by utilizing images acquired by the sensor (miniature camera) SE that is trained on a cameraman as shown in Fig. 24.

5        Generally, a broadcast use large scale television camera comprises a camera body CA and a camera controller 60 which are separated apart from 100 m to 1 km and are interconnected by a camera cable. The cameraman and a video engineer at the camera controller  
10 60 can communicate through a voice channel. However, as for the video channel from the camera CA to the camera controller 60, only a minimum required channel is provided without a videophone channel.

         In view of this, the present embodiment 8  
15 constructs a videophone system by utilizing a video channel (QTV channel) from the camera CA to the camera controller 60 and a video channel (RETURN VIDEO channel) from the camera controller 60 to the camera CA, which are installed in the existing camera system.  
20 The RETURN VIDEO channel is used for transmitting, when operating a plurality of cameras, information on the video condition of a camera to another camera via the camera controller 60.

         In the present embodiment 8, switch transfer as  
25 shown in Fig. 25 is made to switch to the videophone.

         Incidentally, a camera 62 on the video engineer side is not always necessary. This is because the

cameraman can transfer, independently of on-air TV images, the images and voices around the camera CA to the video engineer by collecting them with turning the sensor SE in a desired direction. This greatly serves  
5 for the video engineer to learn conditions around the TV camera CA. In particular, the present embodiment 8 is very effective in such a case as shooting images for live broadcasting because the video output from the sensor SE can be used for the communication between the  
10 cameraman and the video engineer independently of the on-air images.

As described above, according to the present invention, the viewfinder and television camera can be implemented that can always train the image monitor on  
15 the face of a camera operator in response to the panning and tilting of the television camera. In particular, because the liquid crystal display used as an image monitor cannot fully meet the requirement as the viewfinder when its liquid crystal screen is seen from  
20 an angle deviated from the normal angle because of the degradation in resolution, brightness and saturation, the viewfinder that automatically tracks the face of the camera operator offers a distinct advantage. In particular, since the viewfinder automatically tracks  
25 the face of the cameraman even when the height of the television camera is changed by manipulating the dolly, the adjustment of the direction of the viewfinder

becomes unnecessary. Moreover, because it can perform the automatic tracking with a simple configuration, the present invention can provide an apparatus that cannot be conceived from conventional techniques in the cost  
5 and tracking function.

The present invention has been described in detail with respect to various embodiments, and it will now be apparent from the foregoing to those skilled in the art that changes and modifications may be made without  
10 departing from the invention in its broader aspects, and it is the intention, therefore, in the appended claims to cover all such changes and modifications as fall within the true spirit of the invention.

WHAT IS CLAIMED IS:

1. A viewfinder control unit for controlling a  
viewfinder for showing an image output from a  
5 television camera, said viewfinder control unit  
comprising:

detecting means for detecting a particular color  
portion of a television camera operator; and

driving means for training said viewfinder on a  
10 face of the television camera operator in response to  
a detection output from said detecting means.

2. The viewfinder control unit as claimed in claim  
1, wherein said detecting means comprises a miniature  
15 camera for sensor application attached to said  
viewfinder, and detects the particular color portion  
of the television camera operator from an output of said  
miniature camera for sensor application.

20 3. The viewfinder control unit as claimed in claim  
2, wherein said detecting means detects a flesh color  
portion on the face of the television camera operator  
as the particular color portion.

25 4. The viewfinder control unit as claimed in claim  
1, wherein said viewfinder consists of a liquid crystal  
display.





9. A television camera comprising the viewfinder control unit as claimed in any one of claims 1-8, such that the viewfinder is always trained on the face of the television camera operator independently of panning and/or tilting of said television camera.

10. A viewfinder control unit attached to a television camera, said viewfinder control unit comprising:  
10 detecting means for detecting a particular color portion of a television camera operator;  
calculation means for calculating a central position of the particular color portion; and  
driving means for driving a motor for panning  
15 and/or tilting said viewfinder in response to the central position calculated.

11. The viewfinder control unit as claimed in claim 10, wherein said detecting means comprises a miniature camera for sensor application attached to said viewfinder, and detects the particular color portion of the television camera operator from an output of said miniature camera for sensor application.

12. The viewfinder control unit as claimed in claim 11, wherein said detecting means detects a flesh color portion on the face of the television camera operator

as the particular color portion.

13. The viewfinder control unit as claimed in claim  
10, wherein said viewfinder consists of a liquid  
5 crystal display.

14. The viewfinder control unit as claimed in claim  
11, wherein said miniature camera for sensor  
application is rotatably attached to said viewfinder  
10 to make panning and/or tilting possible for capturing  
an accessory worn on the television camera operator.

15. The viewfinder control unit as claimed in claim  
14, wherein the accessory to be captured by said  
15 miniature camera for sensor application consists of a  
weakly luminous object worn on the television camera  
operator.

16. The viewfinder control unit as claimed in claim  
20 10, further comprising:

storing means for storing information on a preset  
position of said viewfinder; and


preset control means for returning said viewfinder  
to the preset position in accordance with the  
25 information on the preset position stored in said  
storing means.

17. The viewfinder control unit as claimed in claim  
11, wherein said miniature camera for sensor  
application is used as an image pickup device of a  
videophone, and said viewfinder is used as a display  
5 unit of the videophone.


18. A television camera comprising the viewfinder  
control unit as claimed in any one of claims 10-17, such  
that the viewfinder is always trained on the face of  
10 the television camera operator independently of  
panning and/or tilting of said television camera.

## ABSTRACT OF THE DISCLOSURE

A viewfinder control unit includes a liquid crystal viewfinder with a hood; a sensor for picking  
5 up the face of a cameraman; a pan motor for horizontally rotating the viewfinder; and a tilt motor for varying the angle the viewfinder makes with a horizontal plane to provide the cameraman with an optimum view angle. The viewfinder undergoes tracking control such that it  
10 is always trained on the face of a cameraman in response to the panning (left or right swing of a lens) and with the tilting (up or down swing of the lens) of the television camera.

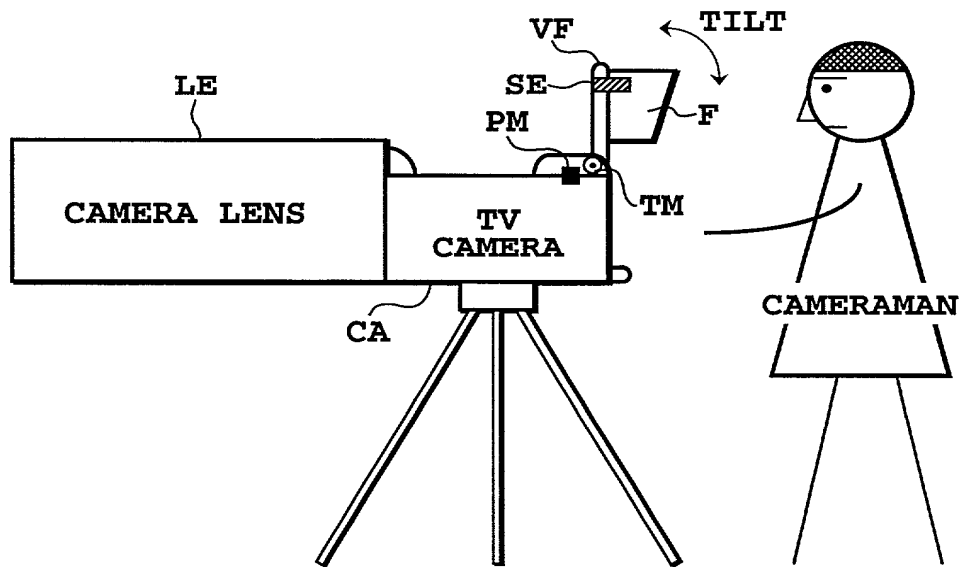

**FIG.1**

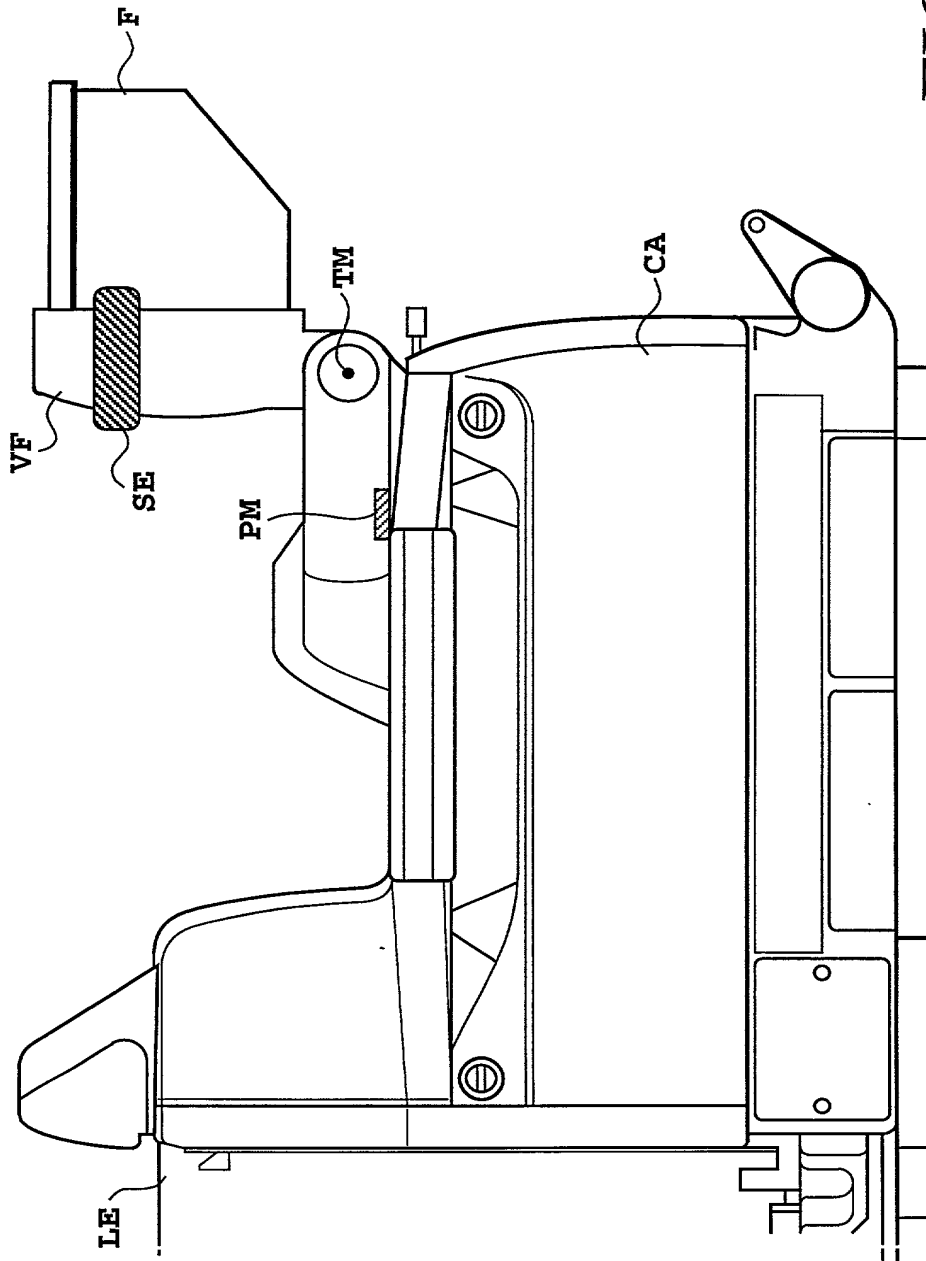


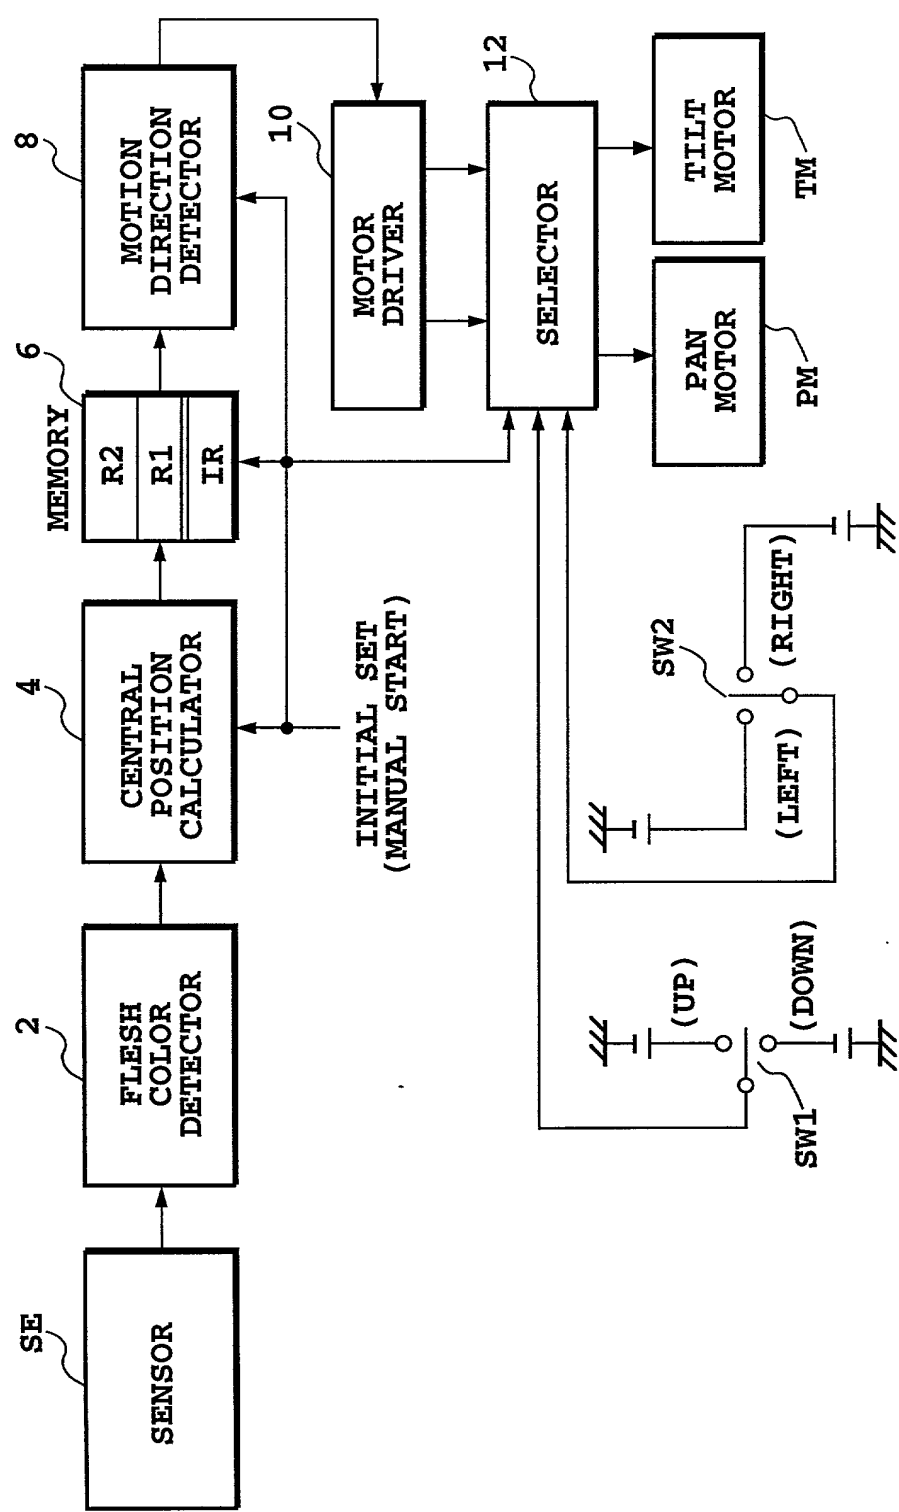


FIG.3

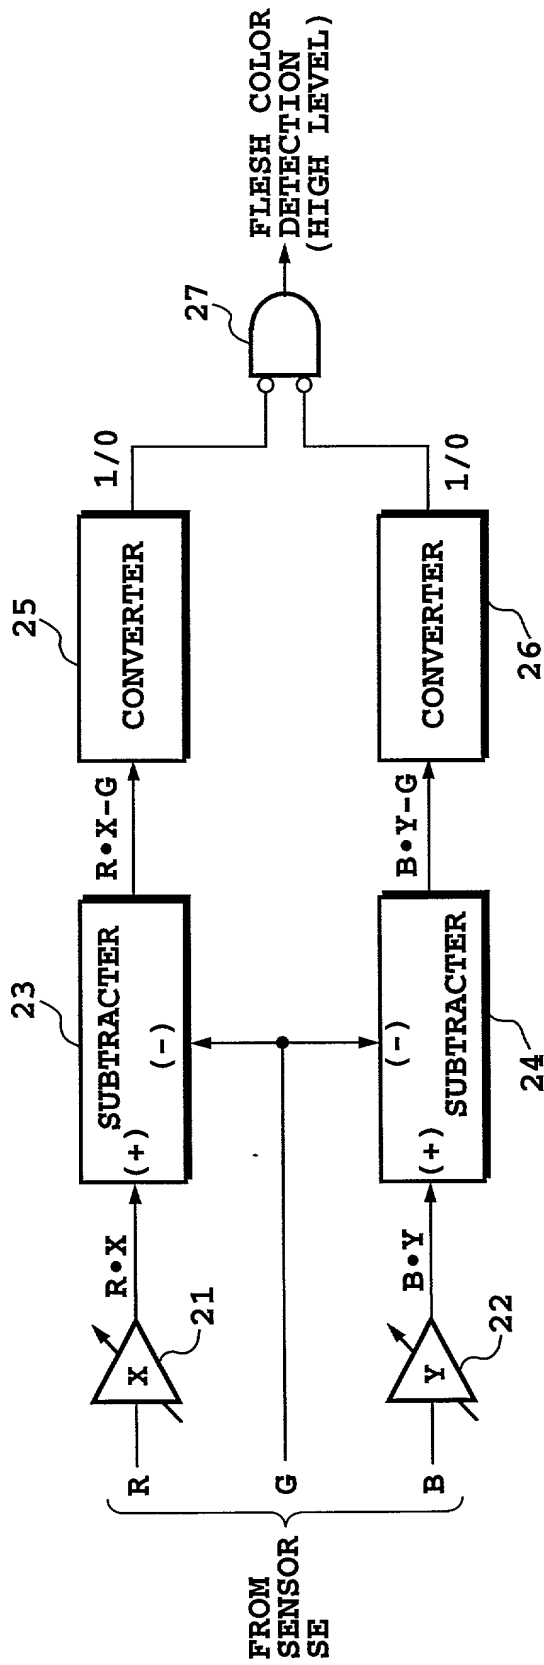

FLESH COLOR  
DETECTOR 2

FIG.4



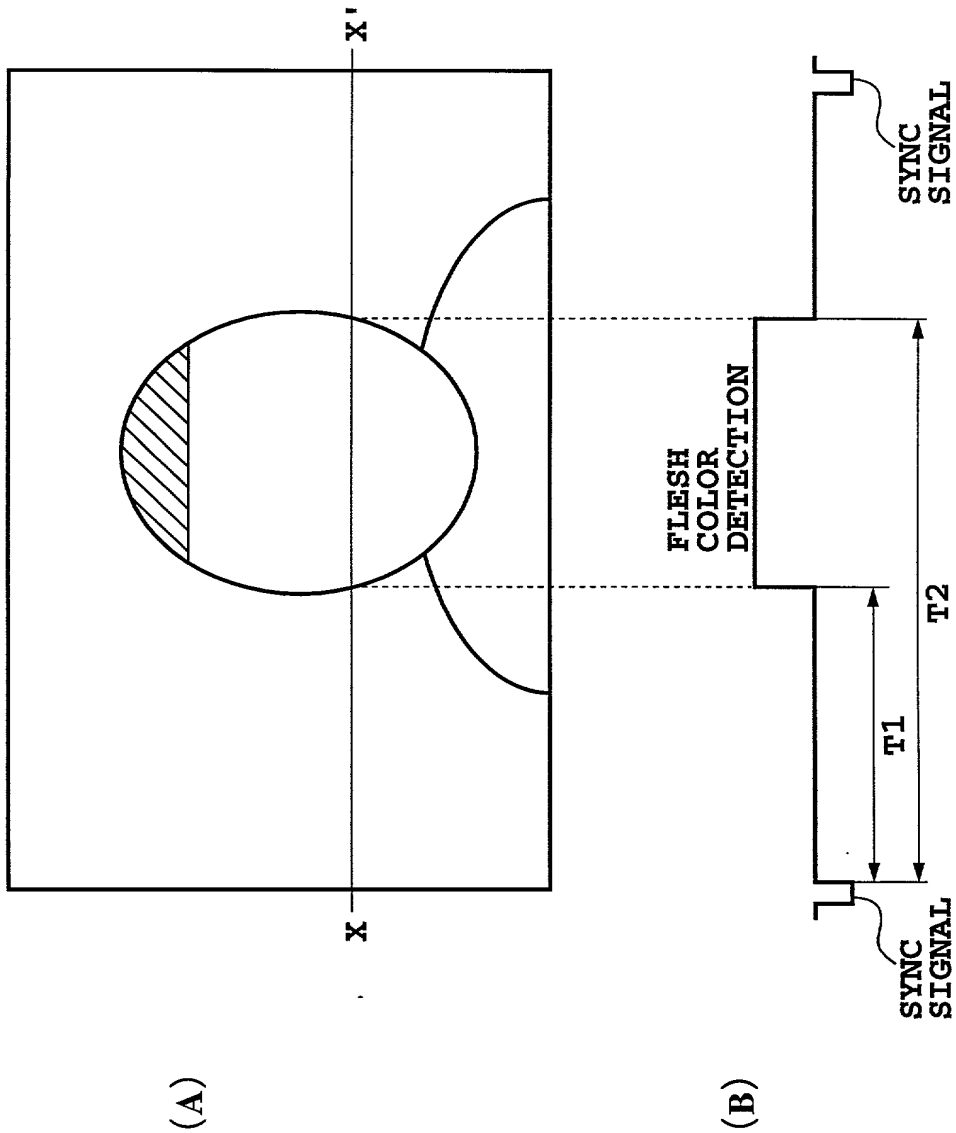


FIG. 5



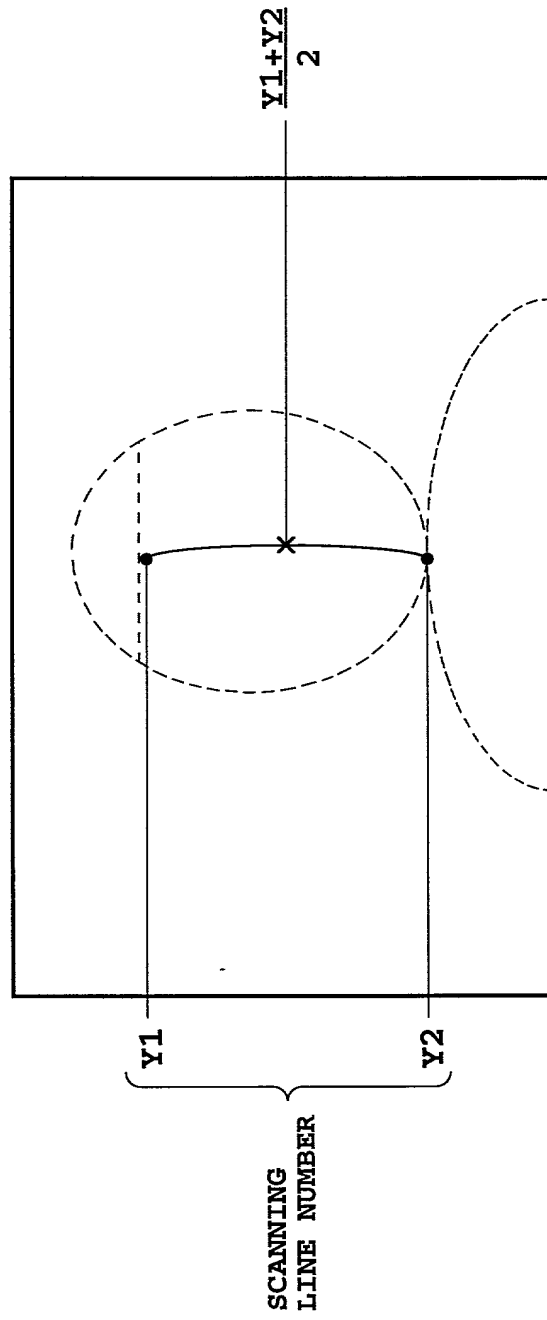



FIG.6

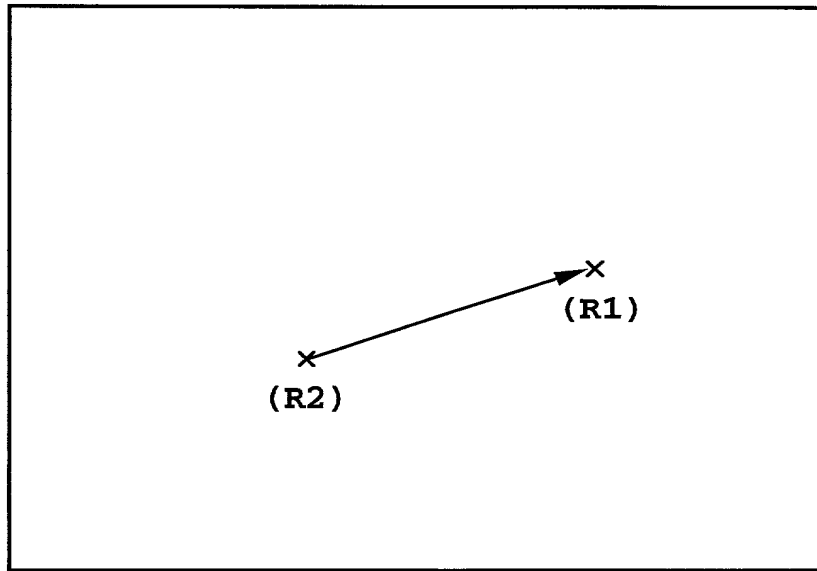

**FIG.7**

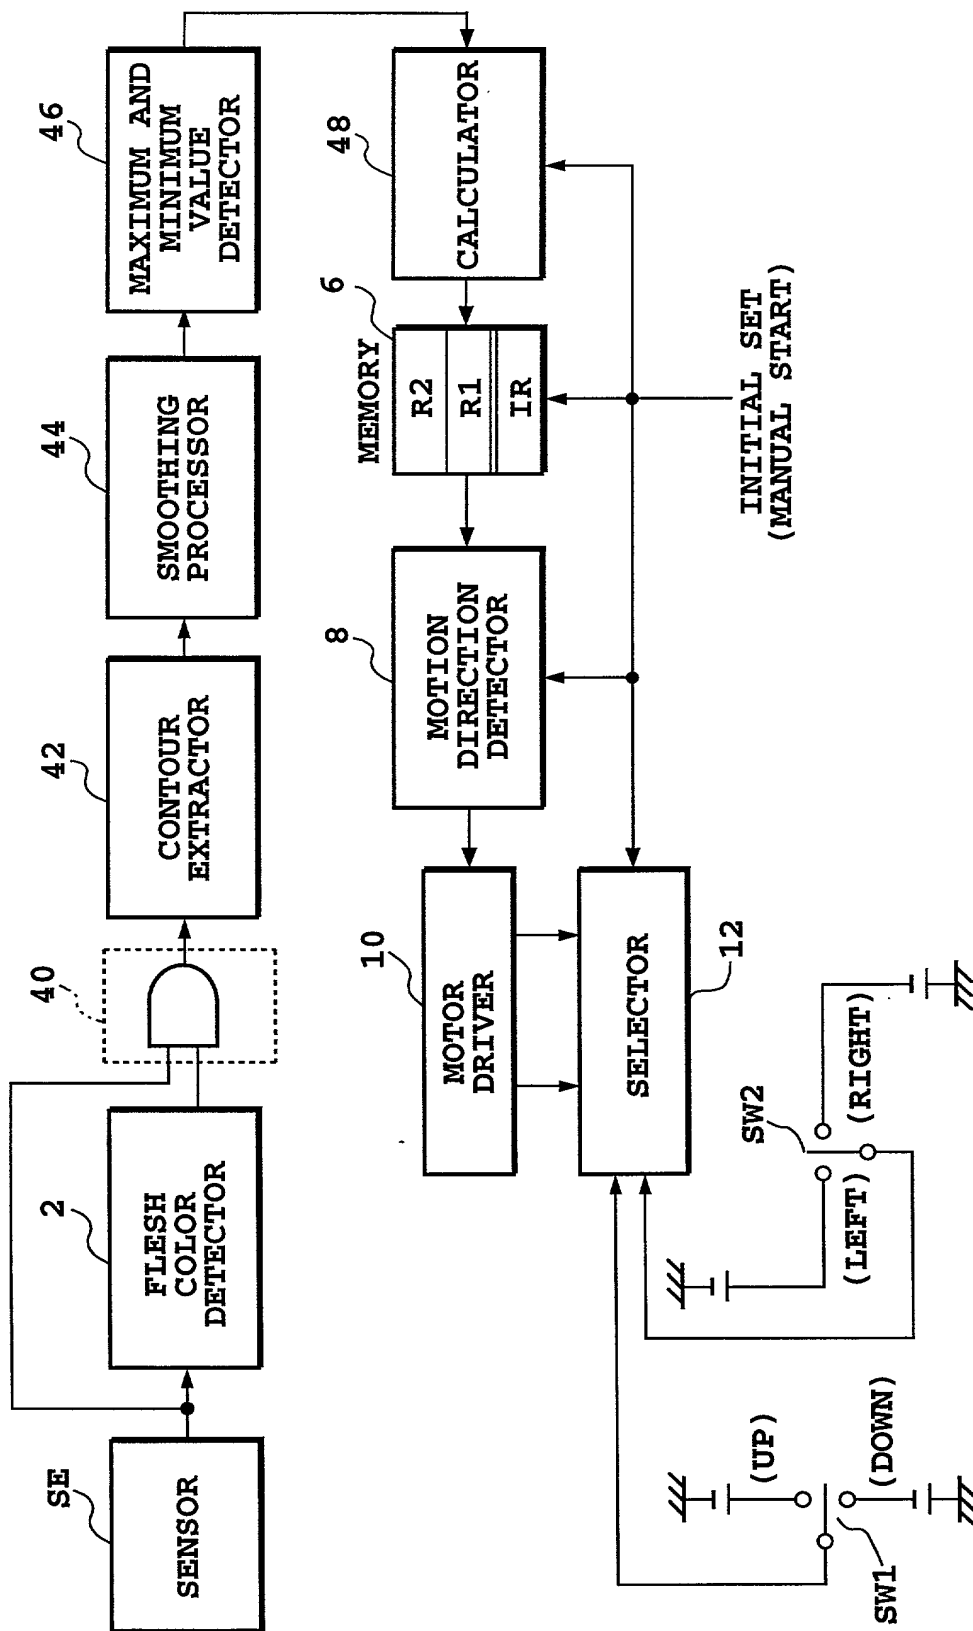


**FIG. 8**

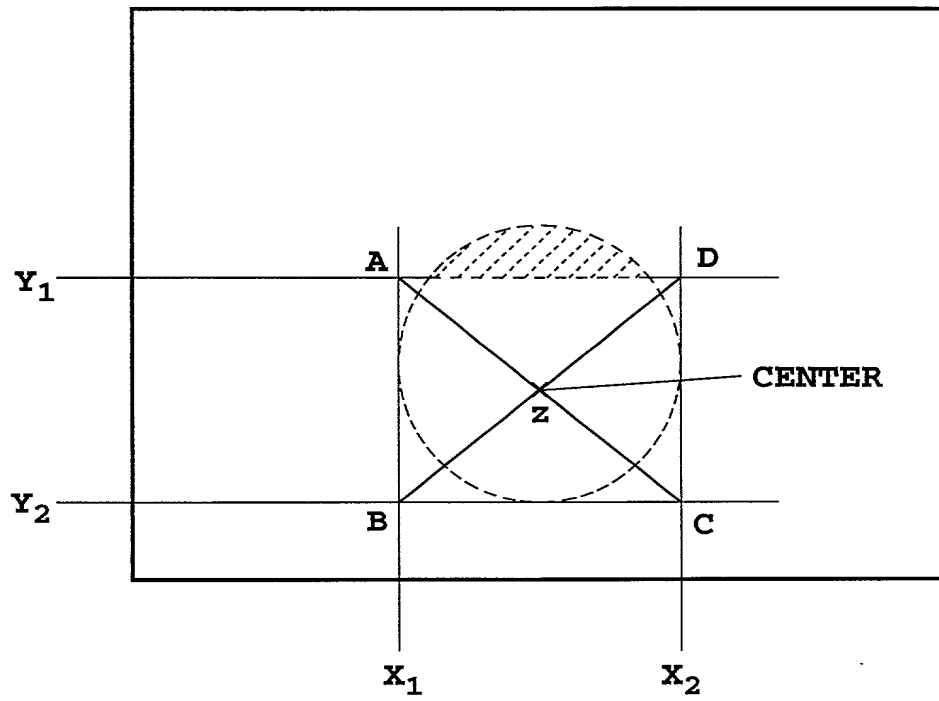


**FIG.9**

10/25

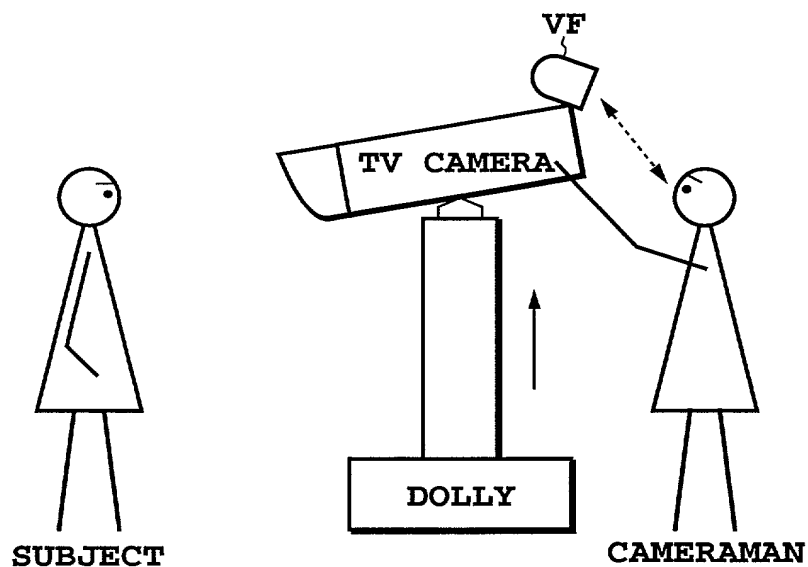

**FIG.10A**

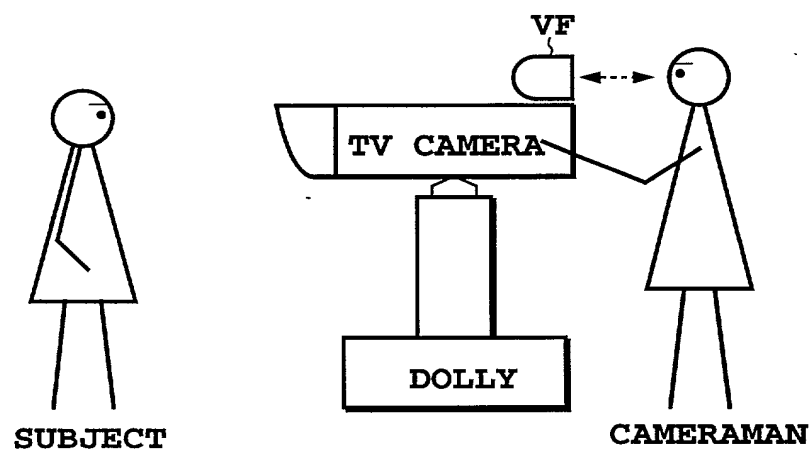

**FIG.10B**

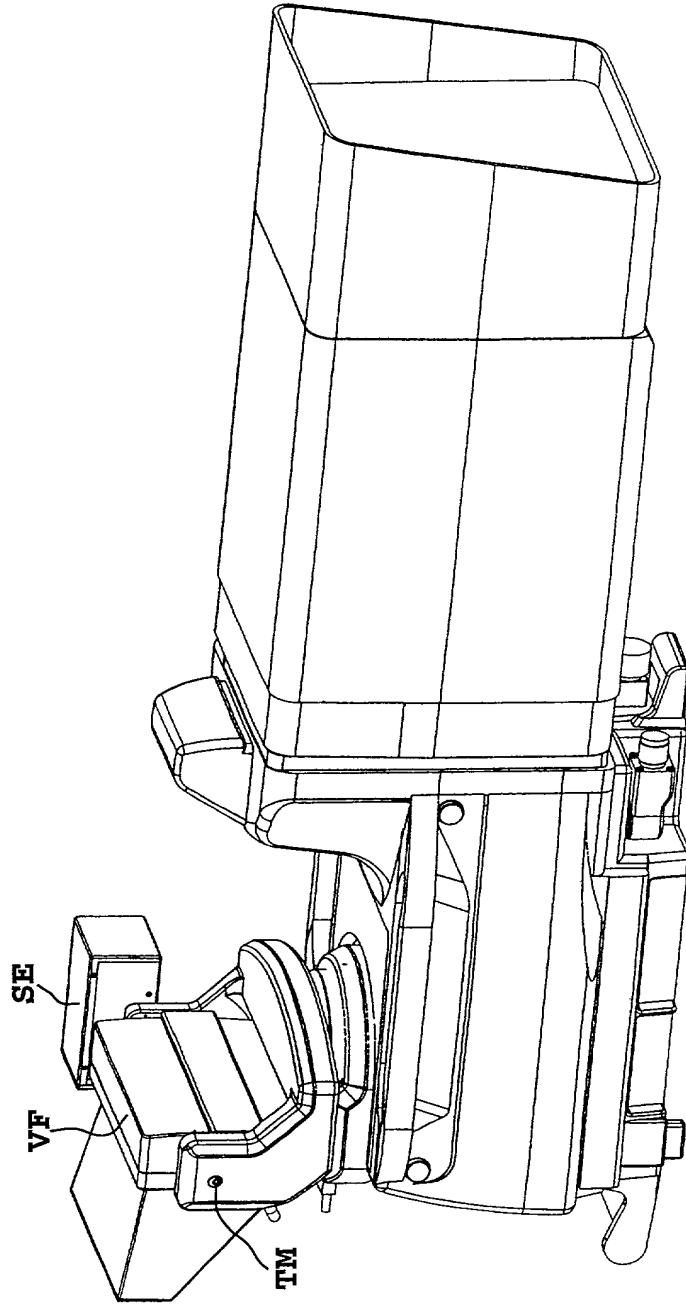


FIG.11


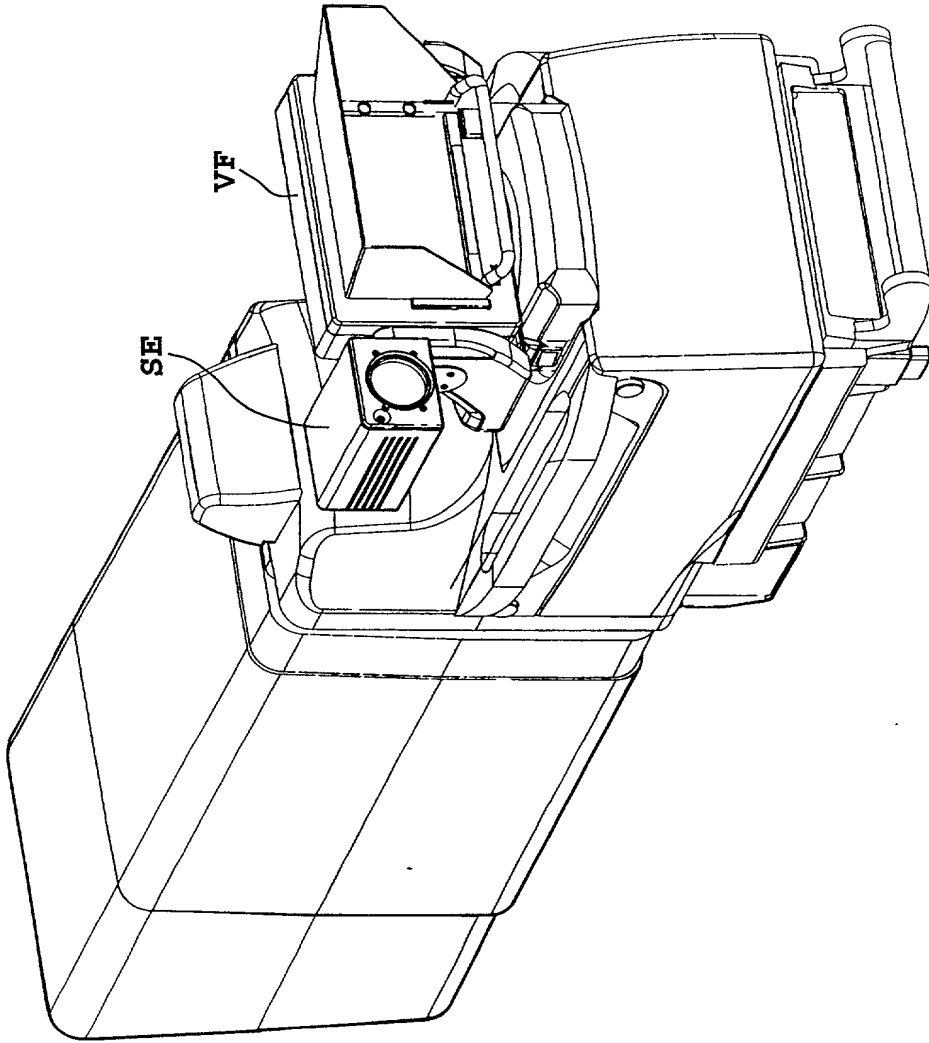



FIG.12






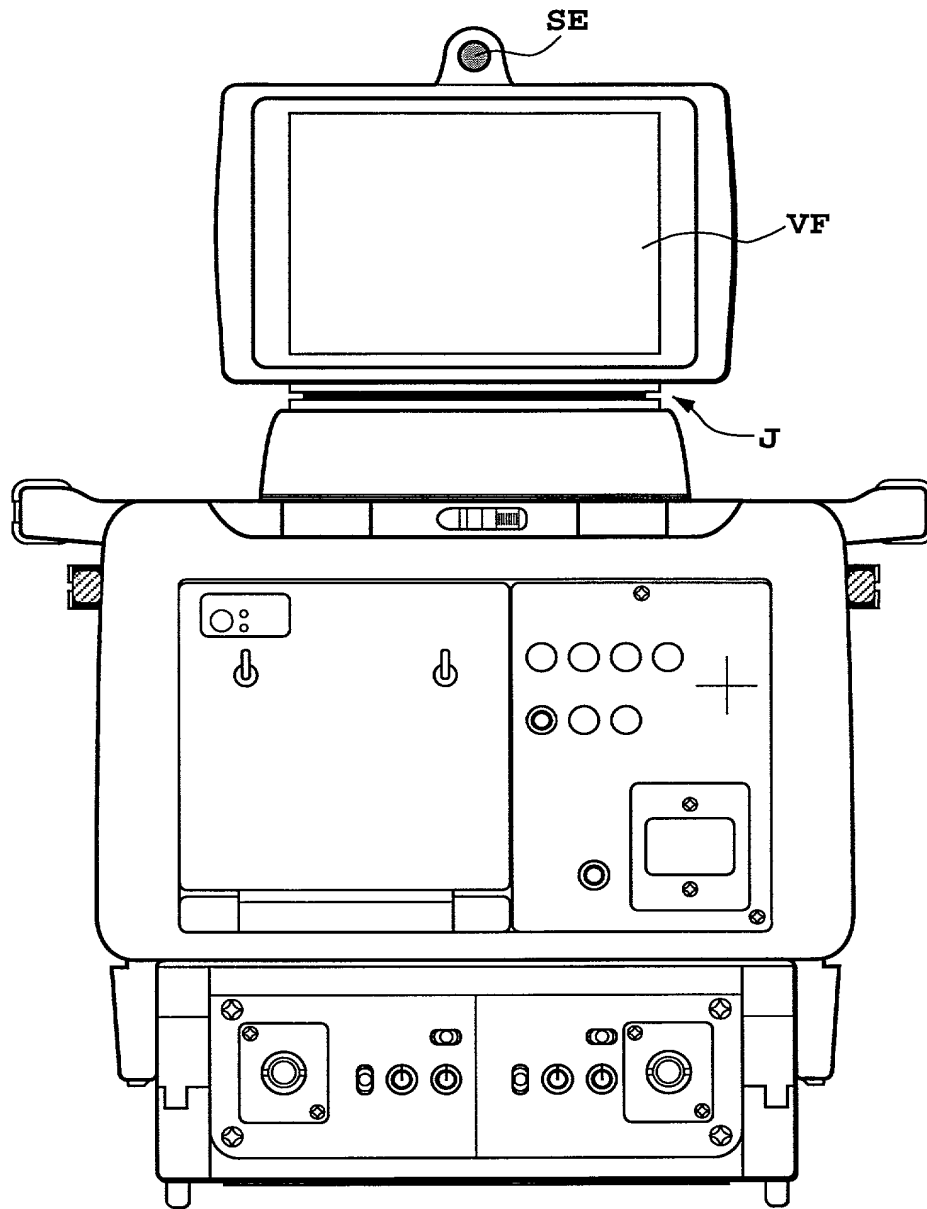



**FIG.14**

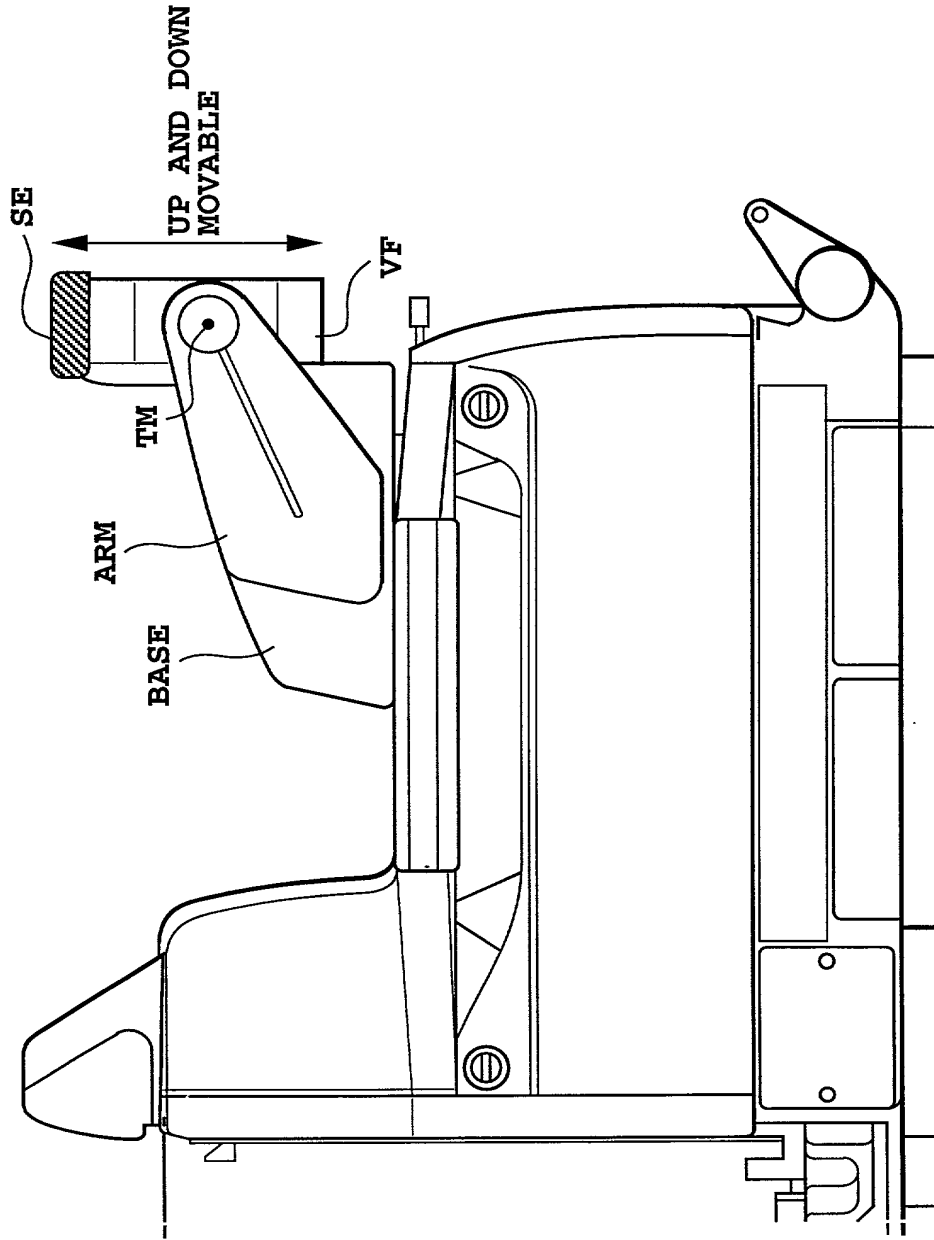


**FIG.15**

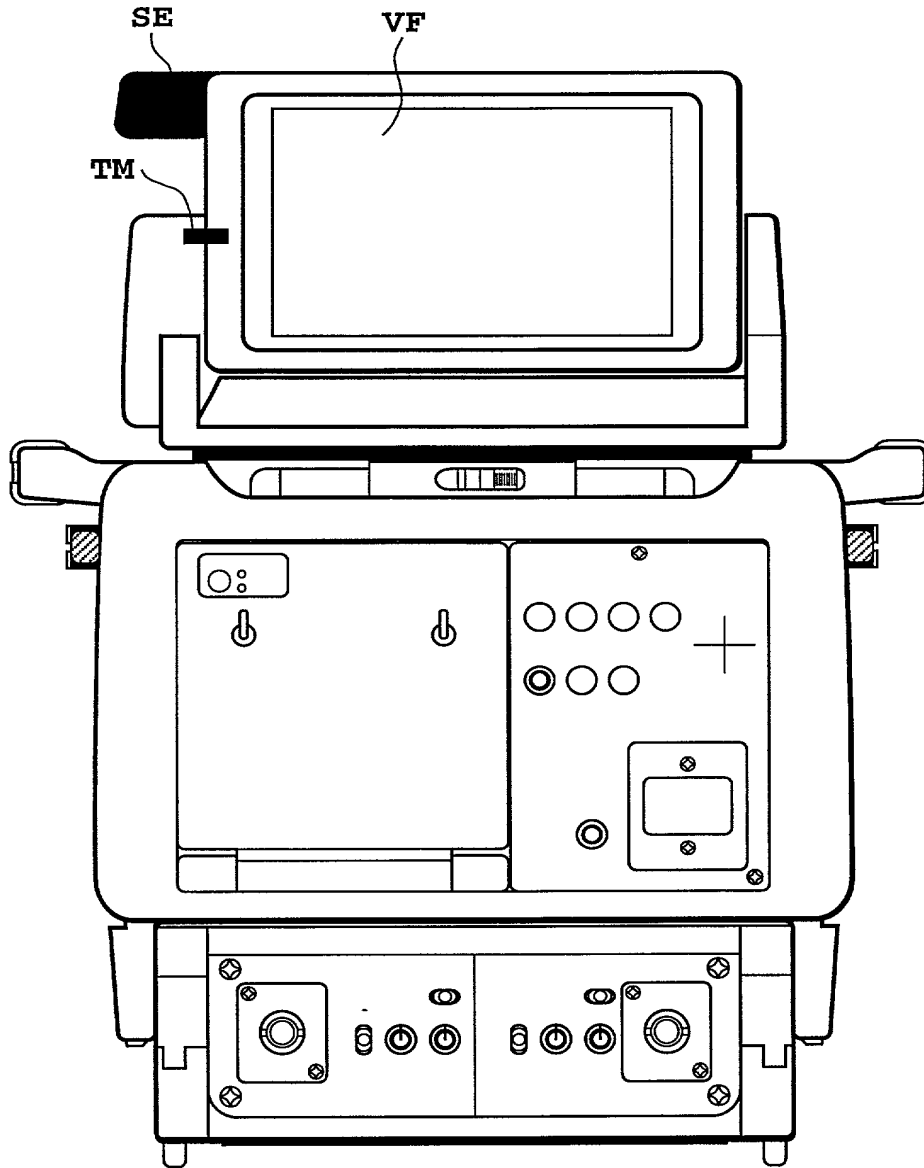

**FIG.16**

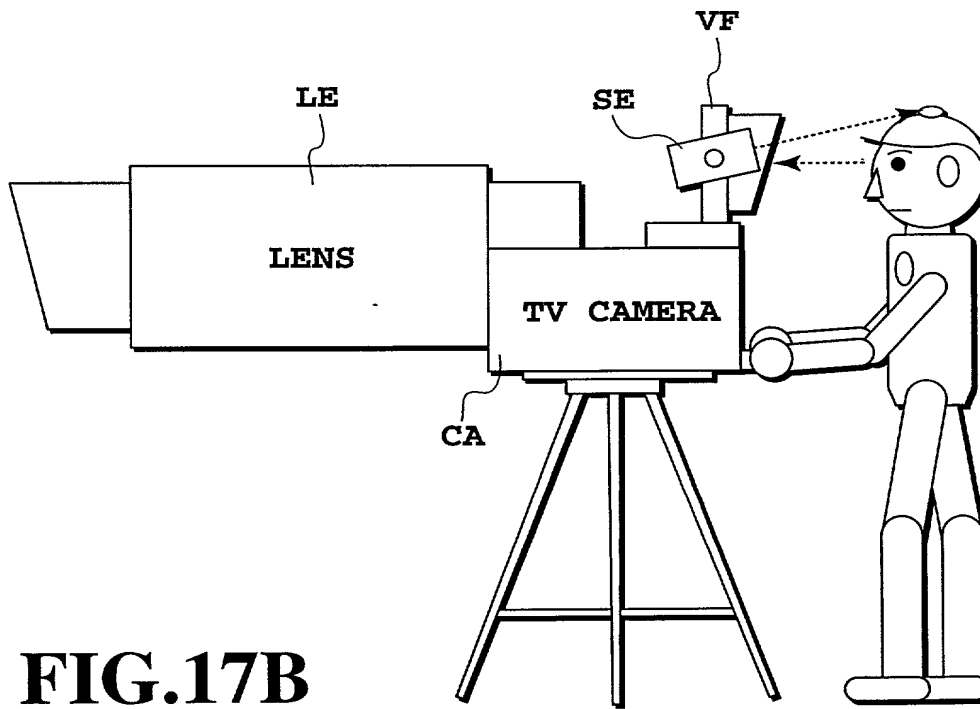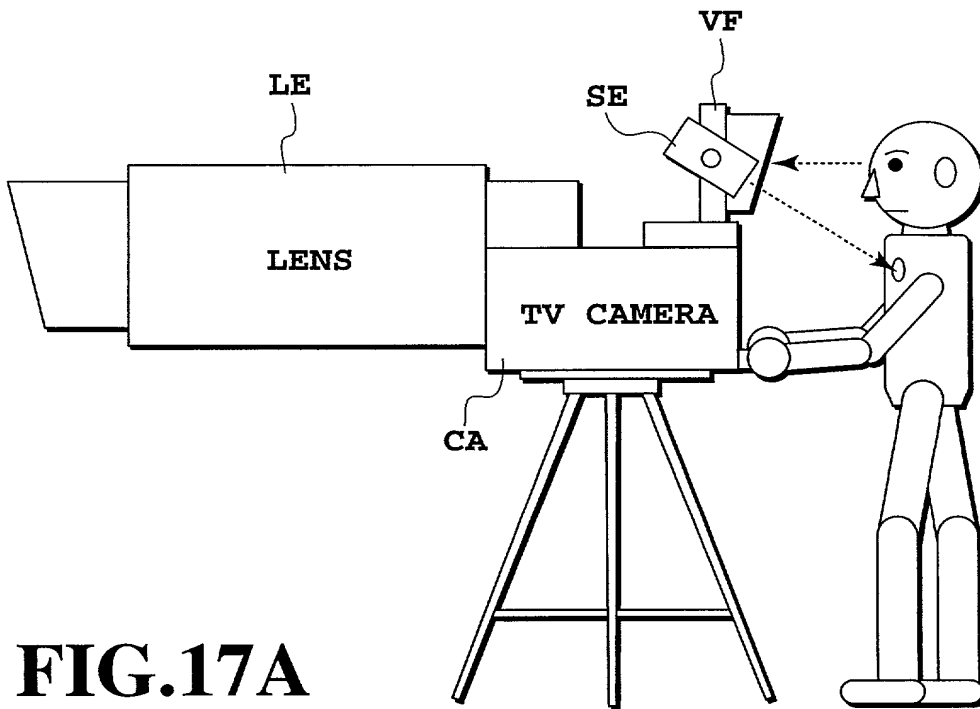

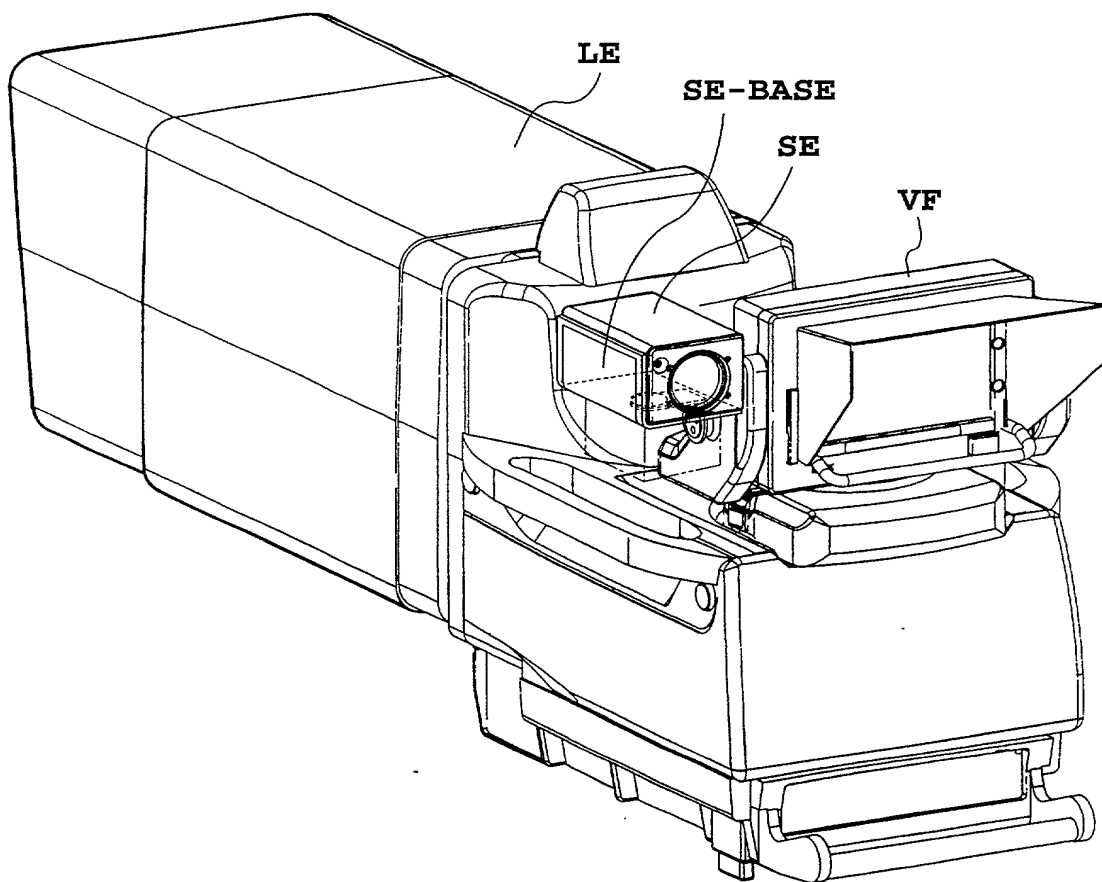

**FIG.18**



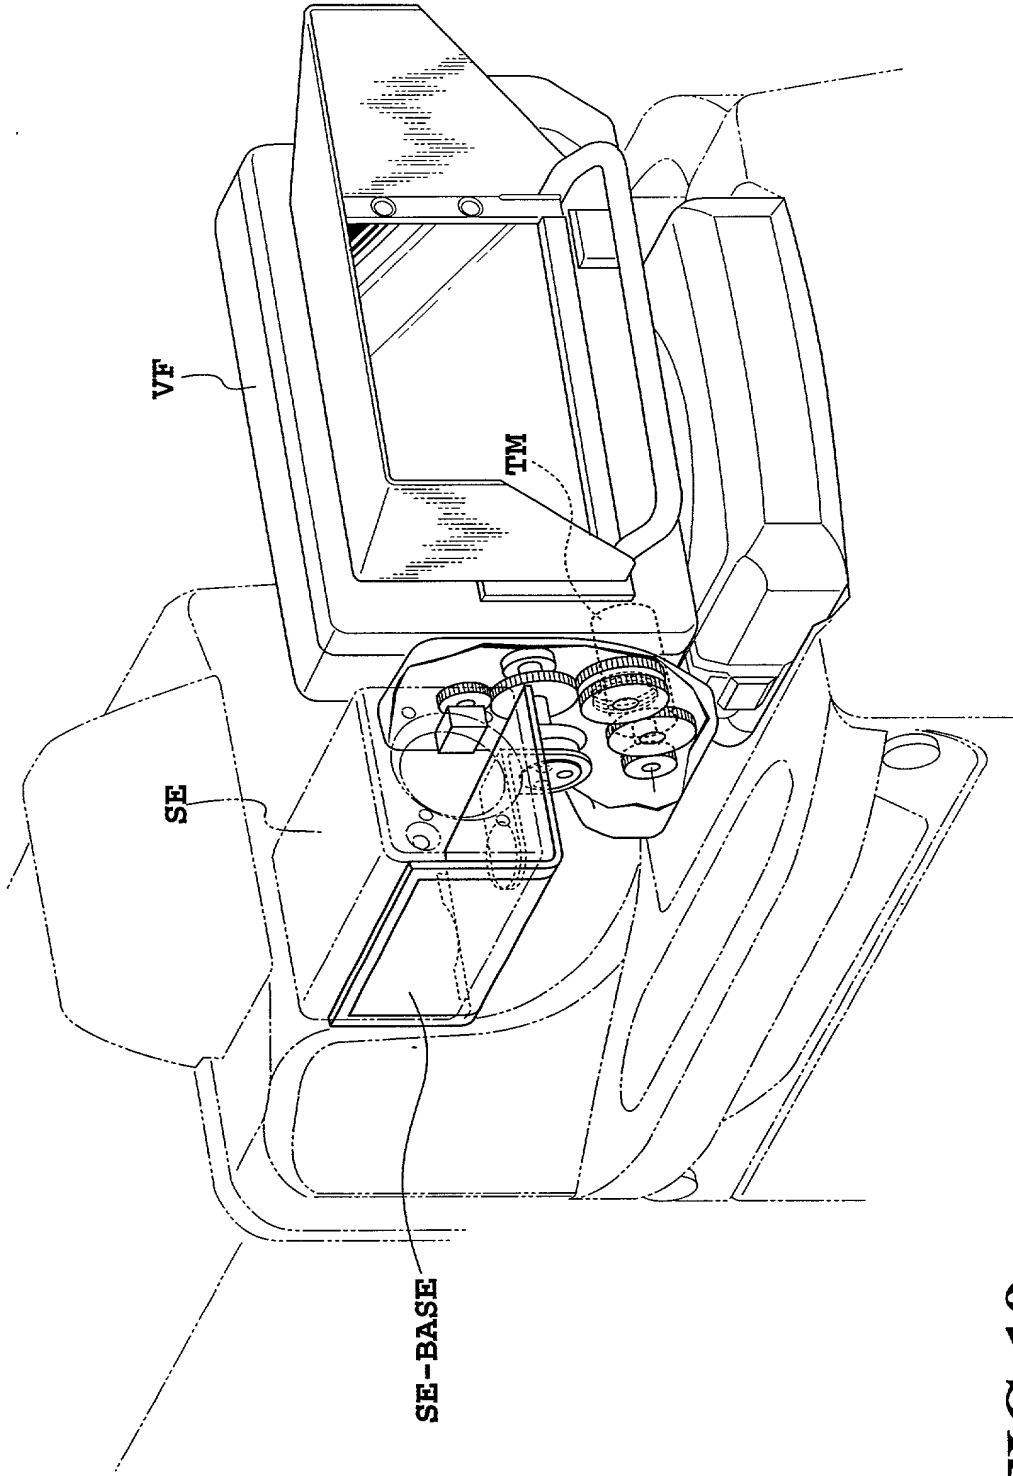


FIG.19




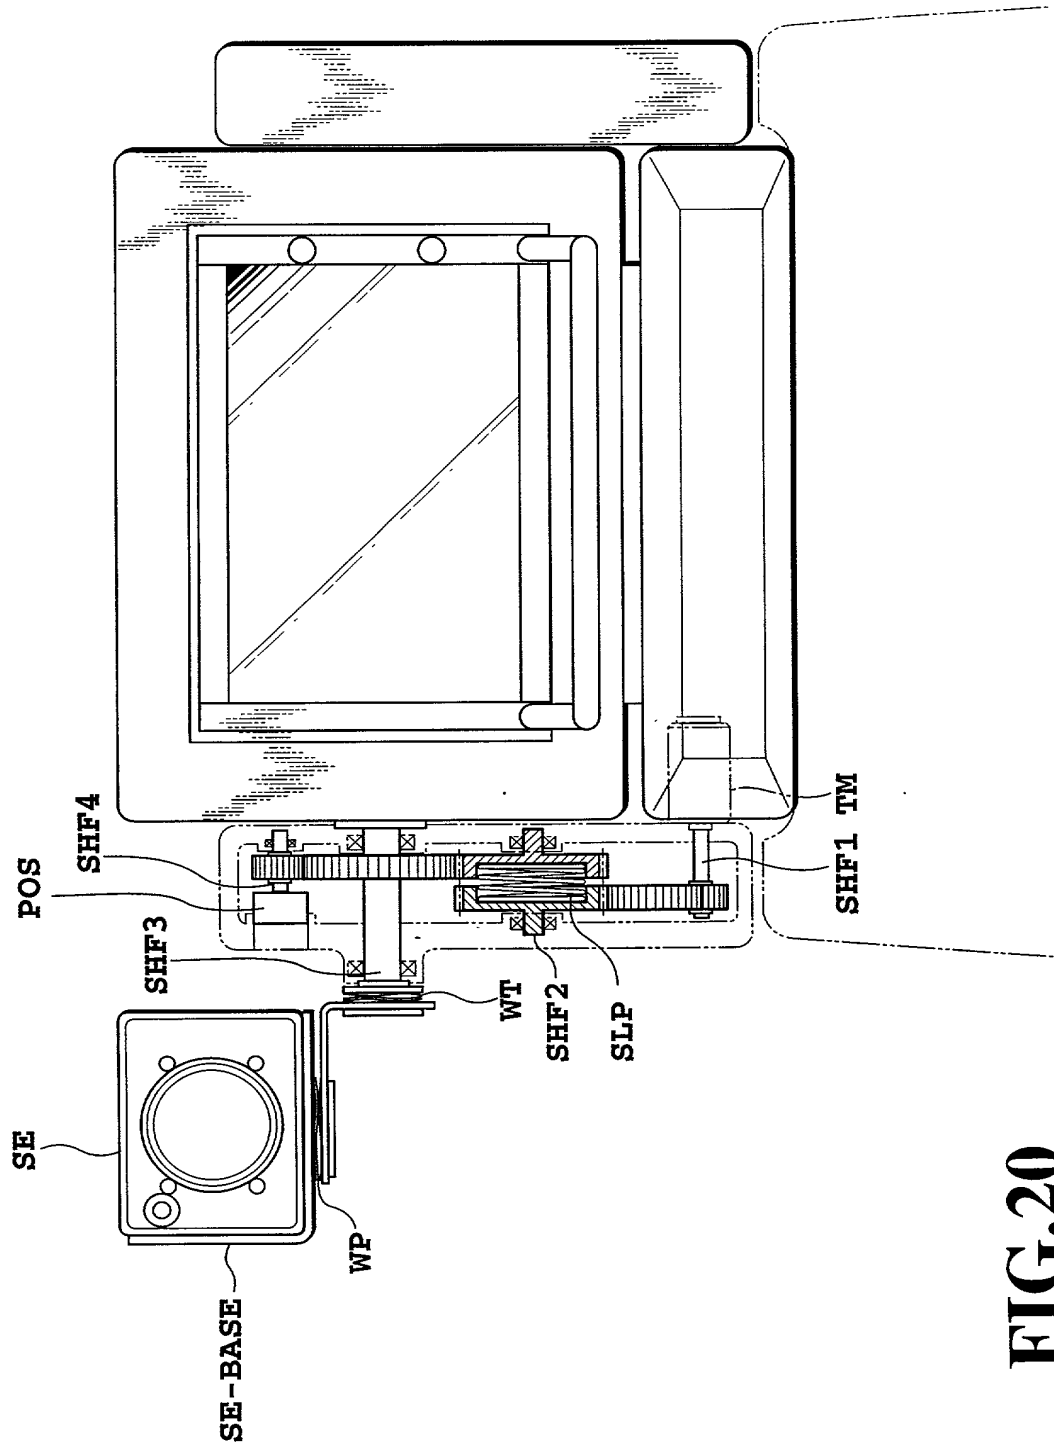

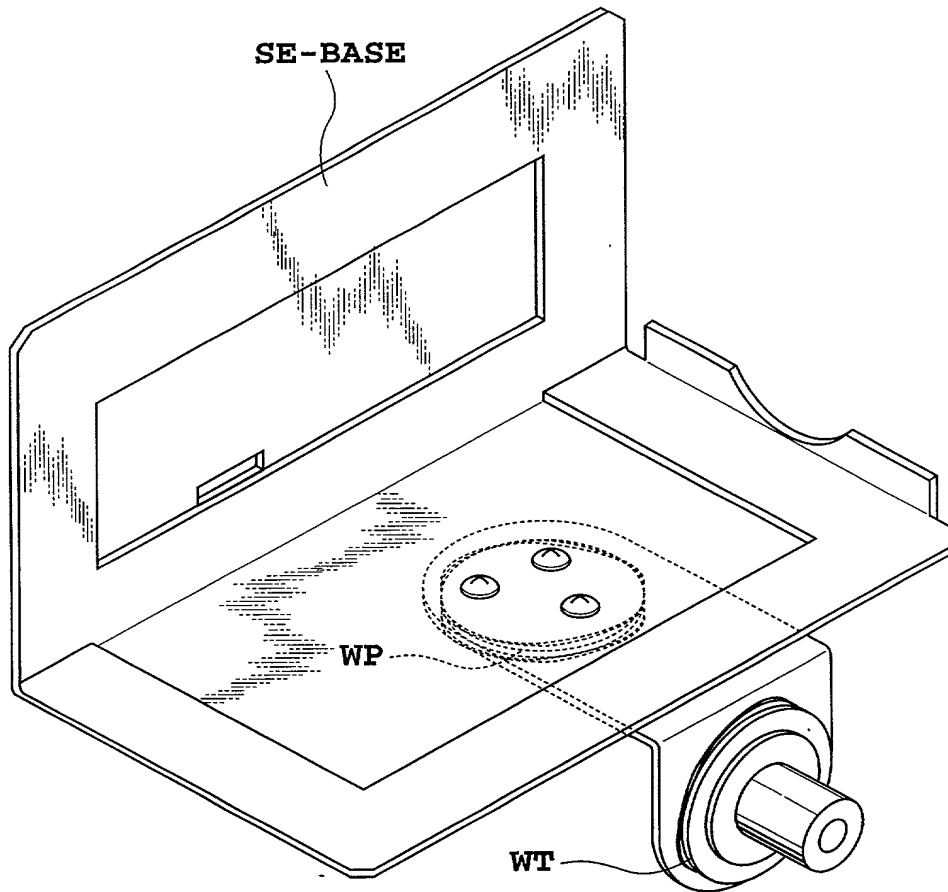

**FIG.21**



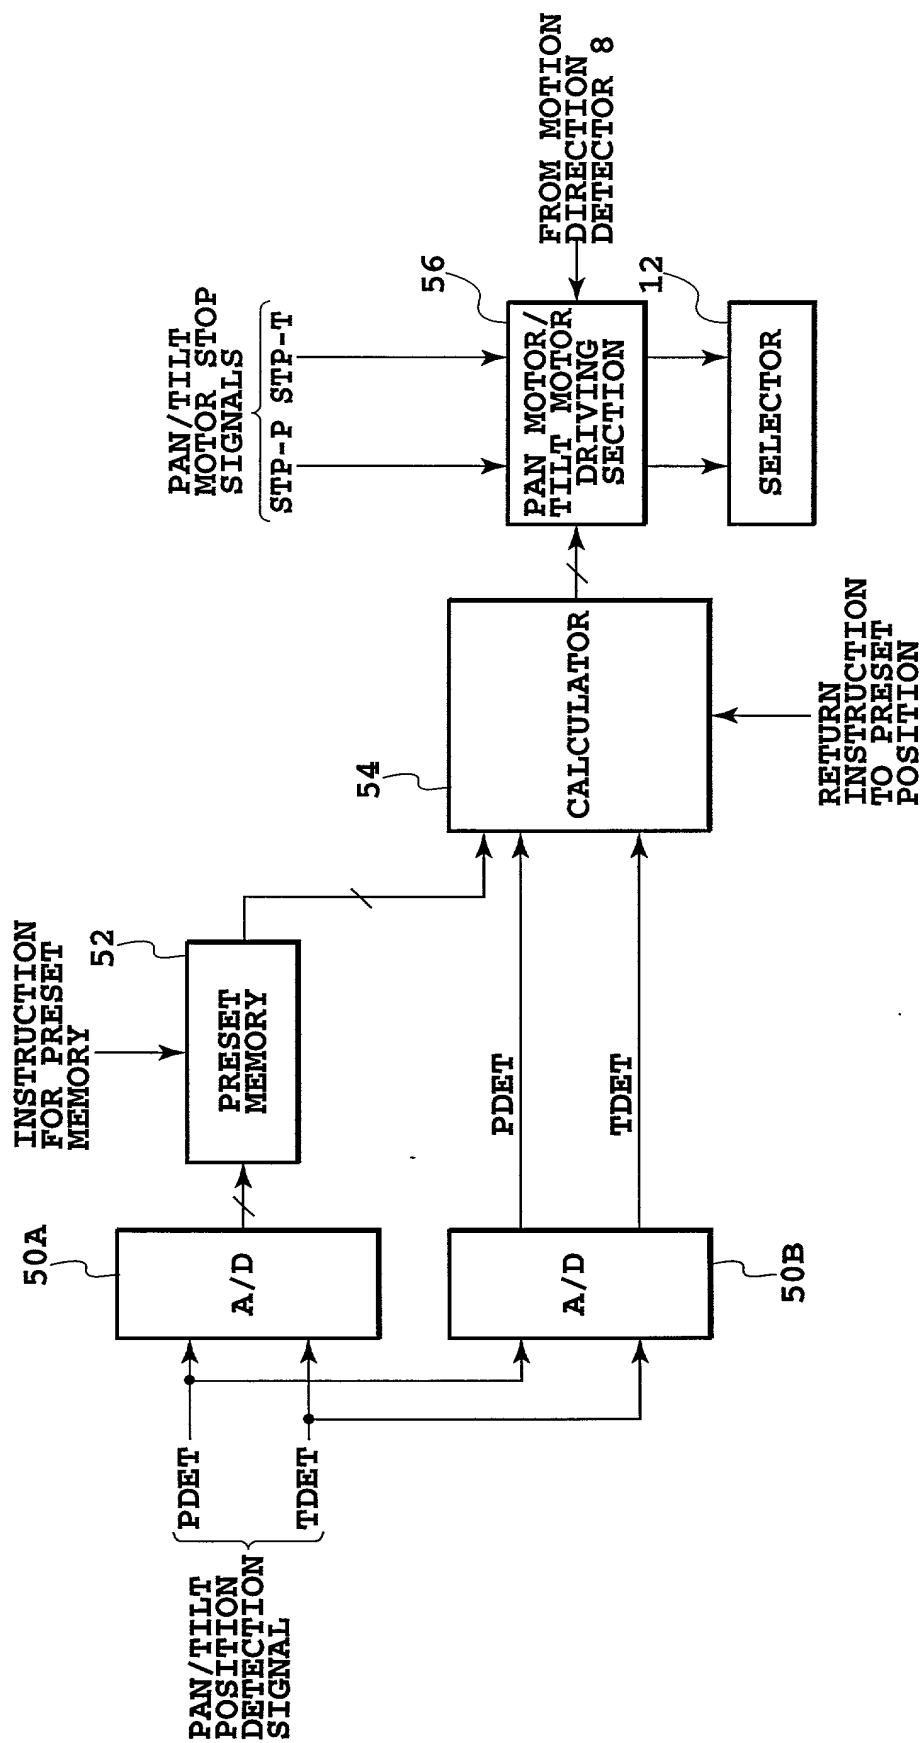

**FIG. 23**

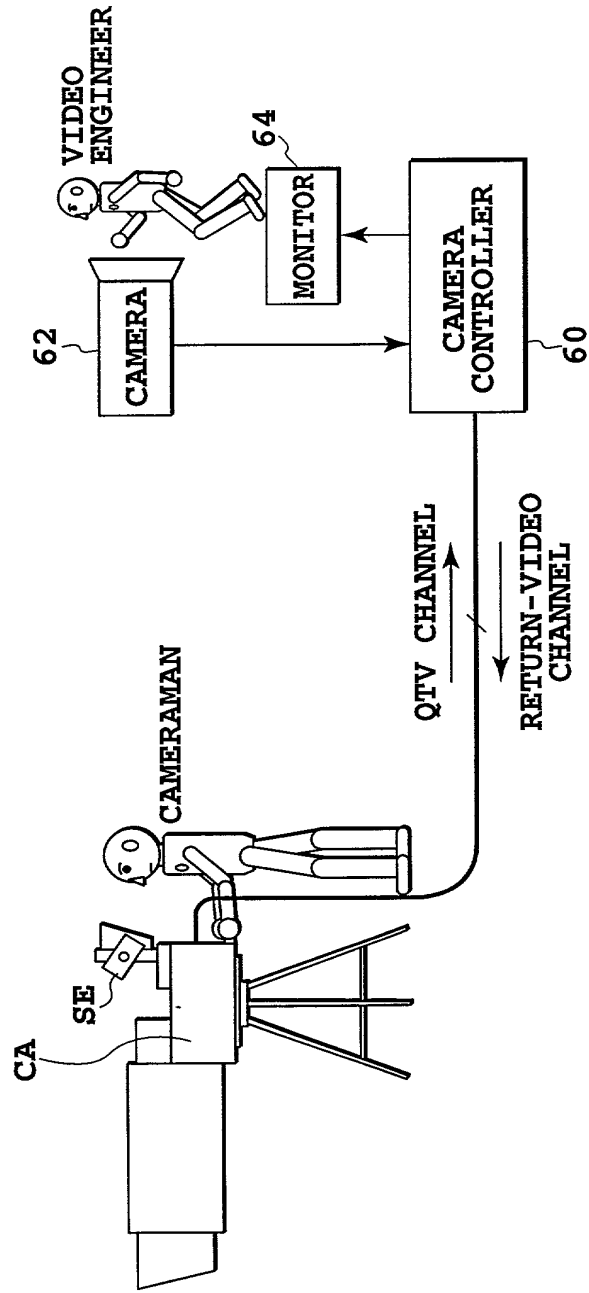


FIG.24

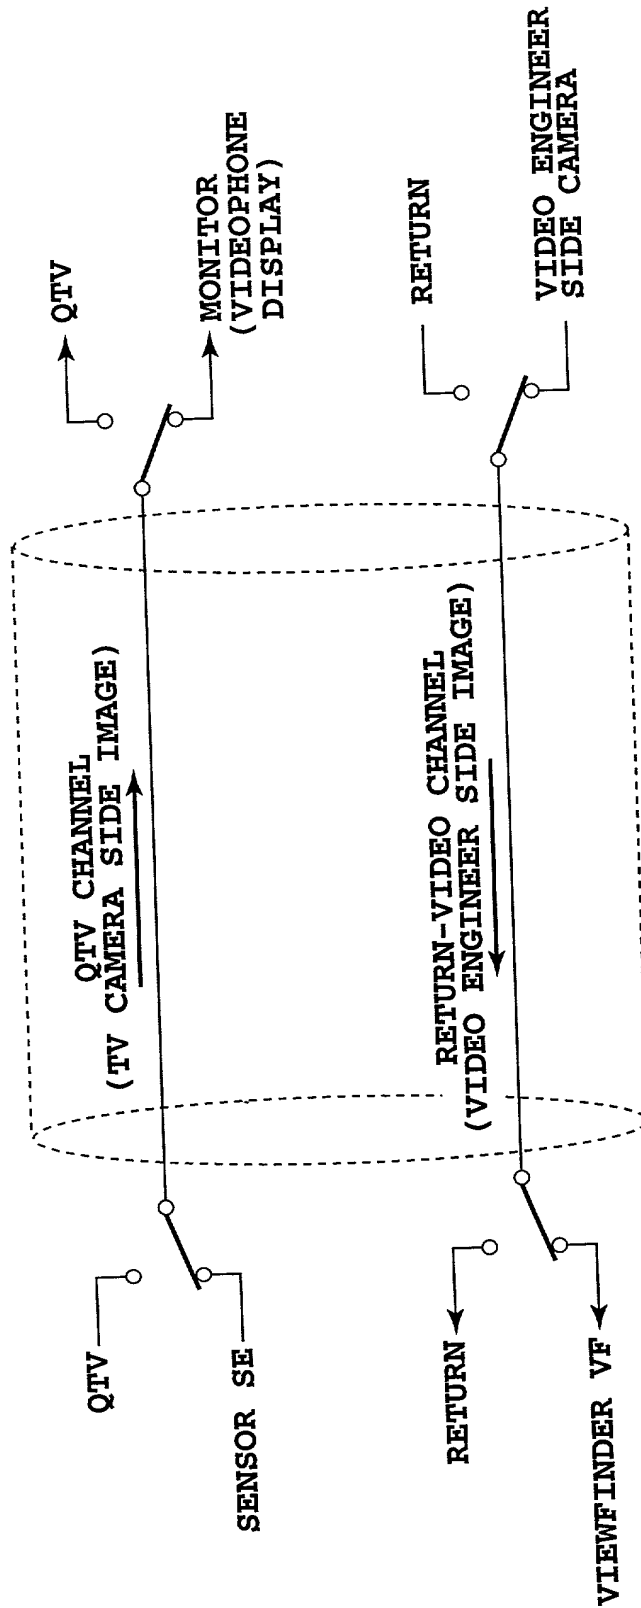


FIG.25

UNITED STATES OF AMERICA COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION		P/ OFGS FILE NO. <b>P/3241-12</b>																																																							
<p>As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named) of the subject matter which is claimed and for which a patent is sought on the invention entitled:</p> <p style="text-align: center;"><b>VIEWFINDER CONTROL UNIT AND TELEVISION CAMERA</b></p>																																																									
<p>the specification of which is attached hereto, unless the following box is checked:</p> <p><input type="checkbox"/> was filed on _____ as United States patent Application Number or PCT International patent application number _____ and was amended on _____ (if any).</p> <p>I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.</p> <p>I acknowledge the duty to disclose all information known to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.</p> <p>I hereby claim priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate or United States provisional application(s) listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:</p> <p><b>Prior Foreign or Provisional Application(s)</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 25%;">COUNTRY</th> <th style="width: 25%;">APPLICATION NUMBER</th> <th style="width: 25%;">DATE OF FILING (day, month, year)</th> <th style="width: 25%;">PRIORITY CLAIMED UNDER 35 U.S.C. 119</th> </tr> </thead> <tbody> <tr> <td>Japan</td> <td>11-109647</td> <td>16,04,1999</td> <td>YES <u>X</u> NO ____</td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td>YES ____ NO ____</td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td>YES ____ NO ____</td> </tr> </tbody> </table> <p>I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">UNITED STATES APPLICATION NUMBER</th> <th style="width: 30%;">DATE OF FILING (day, month, year)</th> <th style="width: 40%;">STATUS (patented, pending, abandoned)</th> </tr> </thead> <tbody> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> </tbody> </table> <p>I hereby appoint customer no. 2352 OSTROLENK, FABER, GERB &amp; SOFFEN, LLP, and the members of the firm, Samuel H. Weiner - Reg. No. 18,510; Jerome M. Berliner - Reg. No. 18,653; Robert C. Faber - Reg. No. 24,322; Edward A. Meilman - Reg. No. 24,735; Stanley H. Lieberstein - Reg. No. 22,400; Steven I. Weisburd - Reg. No. 27,409; Max Moskowitz - Reg. No. 30,576; Stephen A. Soffen - Reg. No. 31,063; James A. Finder - Reg. No. 30,173; William O. Gray, III - Reg. No. 30,944; Louis C. Dujmich - Reg. No. 30,625 and Douglas A. Miro - Reg. No. 31,643, as attorneys with full power of substitution and revocation to prosecute this application, to transact all business in the Patent &amp; Trademark Office connected therewith and to receive all correspondence.</p> <p><b>SEND CORRESPONDENCE TO:</b> OSTROLENK, FABER, GERB &amp; SOFFEN, LLP 1180 AVENUE OF THE AMERICAS NEW YORK, NEW YORK 10036-8403 CUSTOMER NO. 2352</p> <p><b>DIRECT TELEPHONE CALLS TO:</b> (212) 382-0700</p> <p>I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 35%;">FULL NAME OF SOLE OR FIRST INVENTOR Hidetoshi ENDO</td> <td style="width: 35%;">INVENTOR'S SIGNATURE <i>Hidetoshi Endo</i></td> <td style="width: 30%;">DATE April 3, 2000</td> </tr> <tr> <td colspan="2">RESIDENCE (City and either State or Foreign Country) Tokyo, Japan</td> <td>COUNTRY OF CITIZENSHIP Japan</td> </tr> <tr> <td colspan="3">POST OFFICE ADDRESS c/o IKEGAMI TSUSHINKI CO., LTD., 5-6-16, Ikegami, Ohta-ku, Tokyo 146-8567, Japan</td> </tr> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 35%;">FULL NAME OF SECOND JOINT INVENTOR (IF ANY) Hatsuo KITADA</td> <td style="width: 35%;">INVENTOR'S SIGNATURE <i>Hatsuo Kitada</i></td> <td style="width: 30%;">DATE April 3, 2000</td> </tr> <tr> <td colspan="2">RESIDENCE (City and either State or Foreign Country) Tokyo, Japan</td> <td>COUNTRY OF CITIZENSHIP Japan</td> </tr> <tr> <td colspan="3">POST OFFICE ADDRESS c/o IKEGAMI TSUSHINKI CO., LTD., 5-6-16, Ikegami, Ohta-ku, Tokyo 146-8567, Japan</td> </tr> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 35%;">FULL NAME OF THIRD JOINT INVENTOR (IF ANY) Masaharu NISHIMURA</td> <td style="width: 35%;">INVENTOR'S SIGNATURE <i>Masaharu Nishimura</i></td> <td style="width: 30%;">DATE April 3, 2000</td> </tr> <tr> <td colspan="2">RESIDENCE (City and either State or Foreign Country) Tokyo, Japan</td> <td>COUNTRY OF CITIZENSHIP Japan</td> </tr> <tr> <td colspan="3">POST OFFICE ADDRESS c/o IKEGAMI TSUSHINKI CO., LTD., 5-6-16, Ikegami, Ohta-ku, Tokyo 146-8567, Japan</td> </tr> </table>			COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. 119	Japan	11-109647	16,04,1999	YES <u>X</u> NO ____				YES ____ NO ____				YES ____ NO ____	UNITED STATES APPLICATION NUMBER	DATE OF FILING (day, month, year)	STATUS (patented, pending, abandoned)										FULL NAME OF SOLE OR FIRST INVENTOR Hidetoshi ENDO	INVENTOR'S SIGNATURE <i>Hidetoshi Endo</i>	DATE April 3, 2000	RESIDENCE (City and either State or Foreign Country) Tokyo, Japan		COUNTRY OF CITIZENSHIP Japan	POST OFFICE ADDRESS c/o IKEGAMI TSUSHINKI CO., LTD., 5-6-16, Ikegami, Ohta-ku, Tokyo 146-8567, Japan			FULL NAME OF SECOND JOINT INVENTOR (IF ANY) Hatsuo KITADA	INVENTOR'S SIGNATURE <i>Hatsuo Kitada</i>	DATE April 3, 2000	RESIDENCE (City and either State or Foreign Country) Tokyo, Japan		COUNTRY OF CITIZENSHIP Japan	POST OFFICE ADDRESS c/o IKEGAMI TSUSHINKI CO., LTD., 5-6-16, Ikegami, Ohta-ku, Tokyo 146-8567, Japan			FULL NAME OF THIRD JOINT INVENTOR (IF ANY) Masaharu NISHIMURA	INVENTOR'S SIGNATURE <i>Masaharu Nishimura</i>	DATE April 3, 2000	RESIDENCE (City and either State or Foreign Country) Tokyo, Japan		COUNTRY OF CITIZENSHIP Japan	POST OFFICE ADDRESS c/o IKEGAMI TSUSHINKI CO., LTD., 5-6-16, Ikegami, Ohta-ku, Tokyo 146-8567, Japan		
COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. 119																																																						
Japan	11-109647	16,04,1999	YES <u>X</u> NO ____																																																						
			YES ____ NO ____																																																						
			YES ____ NO ____																																																						
UNITED STATES APPLICATION NUMBER	DATE OF FILING (day, month, year)	STATUS (patented, pending, abandoned)																																																							
FULL NAME OF SOLE OR FIRST INVENTOR Hidetoshi ENDO	INVENTOR'S SIGNATURE <i>Hidetoshi Endo</i>	DATE April 3, 2000																																																							
RESIDENCE (City and either State or Foreign Country) Tokyo, Japan		COUNTRY OF CITIZENSHIP Japan																																																							
POST OFFICE ADDRESS c/o IKEGAMI TSUSHINKI CO., LTD., 5-6-16, Ikegami, Ohta-ku, Tokyo 146-8567, Japan																																																									
FULL NAME OF SECOND JOINT INVENTOR (IF ANY) Hatsuo KITADA	INVENTOR'S SIGNATURE <i>Hatsuo Kitada</i>	DATE April 3, 2000																																																							
RESIDENCE (City and either State or Foreign Country) Tokyo, Japan		COUNTRY OF CITIZENSHIP Japan																																																							
POST OFFICE ADDRESS c/o IKEGAMI TSUSHINKI CO., LTD., 5-6-16, Ikegami, Ohta-ku, Tokyo 146-8567, Japan																																																									
FULL NAME OF THIRD JOINT INVENTOR (IF ANY) Masaharu NISHIMURA	INVENTOR'S SIGNATURE <i>Masaharu Nishimura</i>	DATE April 3, 2000																																																							
RESIDENCE (City and either State or Foreign Country) Tokyo, Japan		COUNTRY OF CITIZENSHIP Japan																																																							
POST OFFICE ADDRESS c/o IKEGAMI TSUSHINKI CO., LTD., 5-6-16, Ikegami, Ohta-ku, Tokyo 146-8567, Japan																																																									

☐ CONTINUED ON PAGE 2